

# PCA® Spray Faucet Attachment - 0.35 gpm max Pressure Compensating Junior Size



flow, stop and go®

## Features and Benefits

- ▶ Watercolours® design: Color coding to identify flow rate and stream pattern.
- ▶ Provides non-splashing, non-aerated spray.
- ▶ Pressure compensating for constant flow from 20 to 80 psi.
- ▶ Anti-clogging dome screen filters sediment and particles.
- ▶ Available housing finishes: chrome and polished brass.
- ▶ Laser marked housings with statutory marks.
- ▶ Delivers a flow rate of 30% below the baseline for public access bathrooms (0.5 gpm) to maximize LEED® points in green buildings.

## Certifications

ANSI/NSF®-61-372  
ASME A112.18.1M and CSA B125  
Meets **CALGreen** requirements


## Thread & Part Number

Part #	Designation	Thread Size	Qty.
5510705	Insert only		1
5509805	Junior male	13/16"-27	1
5509905	Junior female	3/4"-27	1
5510205	Vandal proof junior male	13/16"-27	1
5510305	Vandal proof junior female	3/4"-27	1


## Color Code

Dome	Flow Regulator	Basket
Natural	Brown	Dark Gray

## Flow Rate Curve

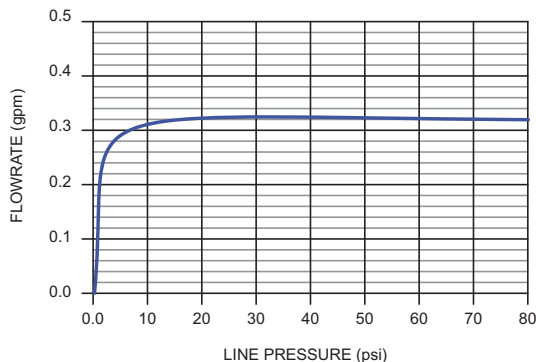

NEOPERL, Inc., Waterbury, CT • Tel: 203-756-8437 • Fax: 203-574-2107 • www.neoperl.com

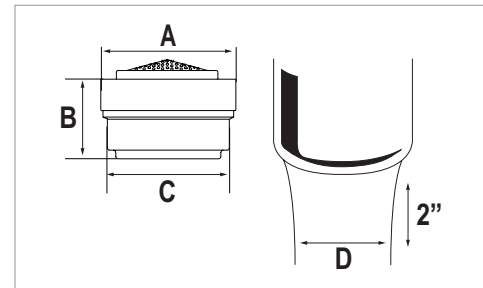

## Dimensions

No	mm	In
A	18.20	.717
B	10.35	.407
C	16.60	.654
D	≈ 22	≈ 7/8

## Housings



## Technical Data

Materials: Body Acetal  
O-ring EPDM  
Washer EPDM

Continuous

Short-term (5 minutes max.)  
Per ASME A112.181 testing requirements.

