# Dayton Sink Pump Systems

## **PUMPS** technical data sheet




Sink pump systems remove above-grade water from residential and commercial applications. These systems are a compact combination of an automatic float switch, a pump and a small basin. They collect water from lavatory basins, sinks or laundry tubs, where a sump or basin installation is not feasible. The wastewater collected in the small sink pump system basin is then pumped out to a larger basin or sump for final removal.




## 12F738 <sup>1</sup>/<sub>3</sub> HP, Cast Iron Sink Pump System

HP	1/3			
Voltage	115V			
Phase	Single			
Frequency	60 Hz			
Run Amps	4.1A			
RPM	3450			
Motor Type	PSC – Oil Filled			
Overload Protection	Internal Thermal Overload			
Motor Shaft Material	Stainless Steel			
Motor Housing Material	Cast Iron			
Motor Duty	Intermittent			

Motor End Bearing	Single Row Ball			
Pump End Bearing	Single Row Ball			
Lubrication	Oil Lubricated			
Discharge	1-1/2 Inch FNPT, Vertical			
Volute Material	Cast Iron			
Base Material	Cast Iron			
Impeller Type	Vortex			
Impeller Material	Stainless Steel			
Hardware Material	Stainless Steel			
O-rings	Buna-N			
Seal Type	Single Mechanical			
Seal Materials	Carbon/Ceramic/Buna-N			
Operation	Automatic / Vertical Switch			
Power Cord	18/3 SJTW, 10' (3m), NEMA 5-15P 115V Plug			
Max. Solids Handling	3/8" (9.5mm) spherical			
Max. Water Temperature	140°F (60°C)			
Designed Fluid Environment	Water / Wastewater			
Switch Type	Vertical			
Switch Cord	10' (3m) SJTOW Power Cord			
Switch Plug	NEMA 5-15P Piggyback Plug			
Switch Max. Run Amps	10A			
Switch Max. Start Amps	60A			
Switch Pumping Range	On at 7" (178mm) Off at 2" (51mm)			
Basin Height	13-3/8" (340mm)			
Basin Capacity	6 Gallons (22.7L)			
Basin Material	High Density Polyethylene Structural Foam			
Basin Discharge	1-1/2 Inch FNPT, Vertical			
Basin Hardware Material	Zinc Plated Steel			




## **Outline Dimensions**



### Performance Data

Head	Feet	5	10	15	20	25
	Meters	1.5	3.1	4.6	6.1	7.6
Flow Rate	GPM	36	30	25	12	0
	LPM	136	114	95	45	0

### Performance Chart

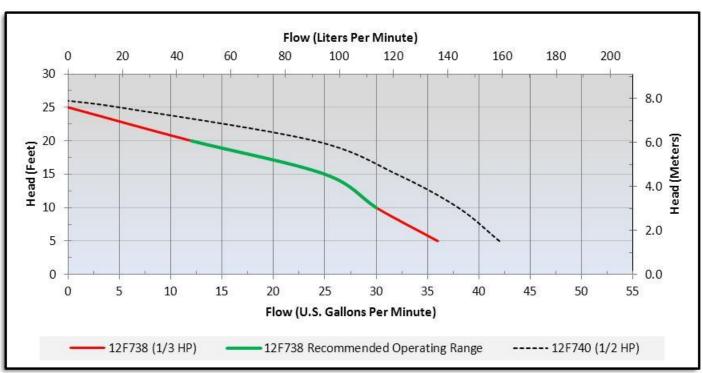

WARNING: Use only with nonflammable liquids compatible with pump component materials and in nonflammable/nonexplosive atmospheres.

