


Replacement Ribbon Model 4000 : Instructions

SIMPLE & SMART™

- 1 Remove the old ribbon cartridge by pressing down on the clip on the right hand side of the ribbon carriage while pulling up on the turning knob.
- 2 Remove the new ribbon cartridge from the packet and gently push the ribbon up to meet the mylar strip.
- 3 While tilting the ribbon cartridge to the left; slide it into the slot on the left hand side of the ribbon carriage.
- 4 Firmly press down on the right side of the ribbon cartridge until you hear it snap into place.
- 5 Twist the turning knob clockwise while gently pressing down to insure the cartidge is locked into place.
- 6 Check the ribbon to be sure it is laying flat against the mylar strip. If there is too much slack, twist the turning knob clockwise while gently pushing down on the ribbon.

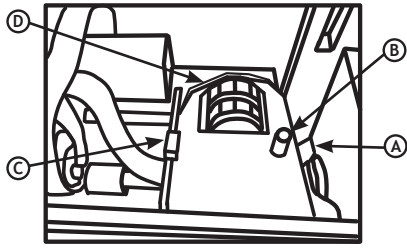

A - Clip
B - Turning Knob
C - Ribbon Slot
D - Mylar Strip

RIBBON SHOULD BE CHANGED EVERY 6 MONTHS.

For assistance please contact customer service at 888.479.7264 ext 1



To watch a video on how to change a ribbon visit our knowledge base at pyramidsystems.com or scan this QR code using a smart phone.




45 Gracey Avenue : Meriden, CT 06451 : 888.479.7264 : pyramidsystems.com

I2223

Replacement Ribbon Model 4000 : Instructions

SIMPLE & SMART™

- 1 Remove the old ribbon cartridge by pressing down on the clip on the right hand side of the ribbon carriage while pulling up on the turning knob.
- 2 Remove the new ribbon cartridge from the packet and gently push the ribbon up to meet the mylar strip.
- 3 While tilting the ribbon cartridge to the left; slide it into the slot on the left hand side of the ribbon carriage.
- 4 Firmly press down on the right side of the ribbon cartridge until you hear it snap into place.
- 5 Twist the turning knob clockwise while gently pressing down to insure the cartidge is locked into place.
- 6 Check the ribbon to be sure it is laying flat against the mylar strip. If there is too much slack, twist the turning knob clockwise while gently pushing down on the ribbon.

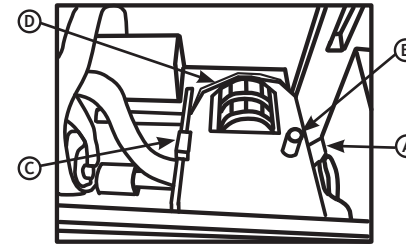

A - Clip
B - Turning Knob
C - Ribbon Slot
D - Mylar Strip

RIBBON SHOULD BE CHANGED EVERY 6 MONTHS.

For assistance please contact customer service at 888.479.7264 ext 1



To watch a video on how to change a ribbon visit our knowledge base at pyramidsystems.com or scan this QR code using a smart phone.




45 Gracey Avenue : Meriden, CT 06451 : 888.479.7264 : pyramidsystems.com

I2223

Replacement Ribbon Model 4000 : Instructions

SIMPLE & SMART™

- 1 Remove the old ribbon cartridge by pressing down on the clip on the right hand side of the ribbon carriage while pulling up on the turning knob.
- 2 Remove the new ribbon cartridge from the packet and gently push the ribbon up to meet the mylar strip.
- 3 While tilting the ribbon cartridge to the left; slide it into the slot on the left hand side of the ribbon carriage.
- 4 Firmly press down on the right side of the ribbon cartridge until you hear it snap into place.
- 5 Twist the turning knob clockwise while gently pressing down to insure the cartidge is locked into place.
- 6 Check the ribbon to be sure it is laying flat against the mylar strip. If there is too much slack, twist the turning knob clockwise while gently pushing down on the ribbon.

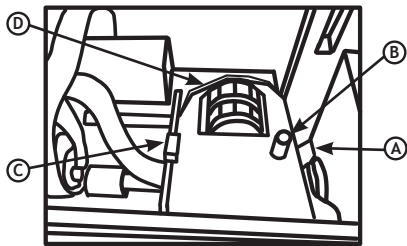

A - Clip
B - Turning Knob
C - Ribbon Slot
D - Mylar Strip

RIBBON SHOULD BE CHANGED EVERY 6 MONTHS.

For assistance please contact customer service at 888.479.7264 ext 1



To watch a video on how to change a ribbon visit our knowledge base at pyramidsystems.com or scan this QR code using a smart phone.




45 Gracey Avenue : Meriden, CT 06451 : 888.479.7264 : pyramidsystems.com

I2223

Replacement Ribbon Model 4000 : Instructions

SIMPLE & SMART™

- 1 Remove the old ribbon cartridge by pressing down on the clip on the right hand side of the ribbon carriage while pulling up on the turning knob.
- 2 Remove the new ribbon cartridge from the packet and gently push the ribbon up to meet the mylar strip.
- 3 While tilting the ribbon cartridge to the left; slide it into the slot on the left hand side of the ribbon carriage.
- 4 Firmly press down on the right side of the ribbon cartridge until you hear it snap into place.
- 5 Twist the turning knob clockwise while gently pressing down to insure the cartidge is locked into place.
- 6 Check the ribbon to be sure it is laying flat against the mylar strip. If there is too much slack, twist the turning knob clockwise while gently pushing down on the ribbon.

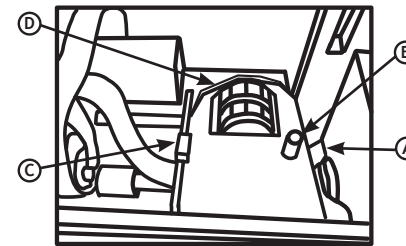

A - Clip
B - Turning Knob
C - Ribbon Slot
D - Mylar Strip

RIBBON SHOULD BE CHANGED EVERY 6 MONTHS.

For assistance please contact customer service at 888.479.7264 ext 1



To watch a video on how to change a ribbon visit our knowledge base at pyramidsystems.com or scan this QR code using a smart phone.



45 Gracey Avenue : Meriden, CT 06451 : 888.479.7264 : pyramidsystems.com

I2223