
# SHARKBITE® CATALOG





# SHARKBITE THE MARK OF QUALITY



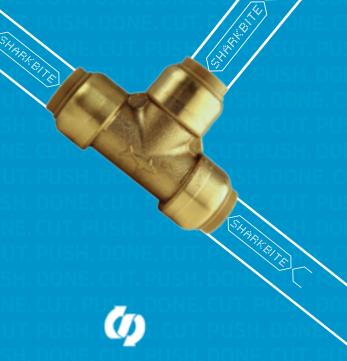

#### **LEAD-FREE/SAFETY\***

All SharkBite® fittings are made of Lead Free DZR brass and exceed ASSE 1061 Section 1V, 4.1 Materials-Dezincification (DZR)-ISO 6509 standards.

\*Reference Page 26 for additional information.

#### **VERSATILE**

SharkBite fittings have the versatility to transition from Copper, PEX, CPVC, PE-RT, HDPE, Polybutylene and PVC.



#### **PROVEN AND GUARANTEED**

SharkBite's quality and performance is field-proven with more than 550 million connections. SharkBite owns the entire manufacturing process, from raw brass to finished product, making SharkBite the only push-to-connect brand that can ensure a clean, leak-free connection.



#### **NO TOOLS**

No glue, solder, clamps or unions required when using SharkBite fittings, providing a quick and efficient application that saves installers time, labor, and money.



#### **FLEXIBILITY**

SharkBite fittings can be rotated even after assembly allowing for easier installation in tight places.



#### **BEHIND-THE-WALL**

SharkBite fittings are approved to be used underground and behind walls without access panels.

#### **CERTIFICATIONS**

- Fittings are certified to 200°F (93°C) max and 200 psi max
- Design certified to NSF/ANSI 61 and ASSE 1061 product standard for use in potable water and hydronic heating water distribution

# TABLE OF CONTENTS

SECTION I: THE SHARRBITE CONNECTION SYSTEM	HE COLLEGE INTERES
1-A: Core Fittings	SH, DONE, CUT, 13
1-B: Radiant Fittings	NE CHE BUCH 7
1-C: Transition Fittings	7
1-D: Fire Fittings	r. PUSH. DONE. C8
1-E: Flex Hoses	SH. DONE. CUT. 18.
1-F: Stops & Fixture Supply Fittings	9
1-G: Additional Products	10
1-H: Kits 1-I: Tools	1. PUSH, DONE, 11 
SECTION 2: SHARKBITE VALVES	NE. CUT. PUSH. C
2-A: Pressure Regulating Valves	13
2-B: Thermostatic Mixing Valves	13
2-C: Ball Valves	SH, DONE, CUIT 14
2-D: PVC Ball Valves	14
2-E: Check Valves	14
2-F: Temperature & Pressure Relief Valves 2-G: General Supply Valves	15 15
SECTION 3: SHARKBITE PEX BARB FITTINGS	NE. CUT. PUSH. 📭
3-A: PEX Barb Core Fittings	r pusu none c <sup>15</sup>
3-B: PEX Barb Transition Fittings	18
3-C: PEX Barb Poly Alloy Fittings	5H. DUNE. CUI. 18
3-D: PEX Barb Fire Fittings	19 20
3-E: PEX Barb Stop & Fixture Supply Fittings 3-F: PEX Barb Additional Products	20
3-G: PEX Barb Accessories	5H DOME CUI 21
3-H: PEX Barb Tools	22
BENEFITS OF SHARKBITE PEX	r. Push. Done. c2
MADE IN THE USA	SH. DONE. CUT. F24
SECTION 4: SHARKBITE PEX PIPE	NE.CUT. PUSH. 12
4-A: Potable Water PEX Pipe	25
4-B: Special Application PEX Pipe	26
LIMITED WARRANTY	2





visit us online or on the go www.sharkbite.com

# SHARKBITE CONNECTION SYSTEM

#### REDEFINING EFFICIENCY

For more than 20 years and with over 250 million fittings installed, SharkBite has been at the forefront of innovating solutions for helping the plumbing trade improve efficiency with enhanced jobsite performance. Being a leader through continuous innovation and providing solutions that address the challenges that plumbing professionals face every day is who we are. Whether you are repairing a water line, installing a water heater, remodeling a home or plumbing a system in a new construction job, SharkBite provides proven solutions that save time, reduce cost, and have the versatility to overcome the most difficult situations.

#### **TOTAL SYSTEM**

The SharkBite system includes a wide range of plumbing fittings, valves, PEX pipe, outlet boxes and other plumbing accessories, making it the only system that is a total end-to-end plumbing solution from meter to fixture. This means compatibility and peace of mind quality that is backed by a single manufacturer.

www.sharkbite.com

All SharkBite fittings are made of Lead Free DZR brass and exceed ASSE 1061 Section 1V, 4.1 Materials-Dezincification (DZR) - ISO 6509 standards.





SHARKB

#### PRODUCT DESCRIPTION PART NUMBER QTY/BAG

#### SECTION 1: THE SHARKBITE CONNECTION SYSTEM

#### **1-A: CORE FITTINGS COUPLINGS** 1/4" (3/8" OD) X 1/4" (3/8" OD) U004LF 3/8" (1/2" OD) X 3/8" (1/2" OD) U006LF 6 1/2" X 1/2" U008LF 12 3/4" X 3/4" U016LF 12 1" X 1" U020LF 6 1-1/4" X 1-1/4" (For PEX applications, stiffeners are sold separately) SB0135 1 1-1/2" X 1-1/2" (For PEX applications, stiffeners are sold separately) SB0141 1 2" X 2" (For PEX applications, stiffeners are sold separately) SB0154 1 **REDUCING COUPLINGS** 1/4" (3/8" OD) X 1/2" U050LF 3/8" (1/2" OD) X 1/2" U009LF 6 3/4" X 1/2" U058LF 12 1" X 3/4" U060LF 6 1-1/4" X 1" (For PEX applications, stiffeners are sold separately) SB013528 1-1/2" X 1" (For PEX applications, stiffeners are sold separately) SB014128 1 1-1/2" X 1-1/4" (For PEX applications, stiffeners are sold separately) SB014135 2" X 1-1/2" (For PEX applications, stiffeners are sold separately) SB015441



SharkBite slip couplings and tees are ideal for repairing and tapping into existing rigid pipe lines. The slip feature ensures the pipe is fully engaged into the fitting when the pipe is in a fixed position. The slip end is only suitable for use with Copper and CPVC pipe.

#### SLIP COUPLINGS (SLIP END ONLY SUITABLE FOR COPPER AND CPVC)

Slip couplings are the most efficient way to repair a burst pipe or leak. Slip fittings simply repair by doing the job that two couplings and extra pipe used to do. Only one end of the coupling has as stop, allowing the opposite end to slide freely over the end of a pipe. The fittings can then be released with a disconnect tool and slid back onto the other end of the pipe for a successful connection and leak repair.

1/2"	X 1/2"	U3008LF	3
3/4" X 3/4"		U3016LF	3
1" X 1	п	U3020LF	1
æ	1-1/4" X 1-1/4" (For PEX applications, stiffeners are sold separately)	SB0635	1
LARGE DIAMETER	1-1/2" X 1-1/2" (For PEX applications, stiffeners are sold separately)	SB0641	1
5	2" X 2" (For PEX applications, stiffeners are sold separately)	SB0654	1
FEMALE CONNECTORS			
1/4" (3/8" OD) X 1/2" FNPT Reducing U066LF 6			
3/8"	(1/2" OD) X 1/2" FNPT Reducing	U070LF	6
1/2"	X 1/2" FNPT Straight	U072LF	12

#### HOW TO INSTALL SHARKBITE PUSH-TO-CONNECT PRODUCTS



**CUT:** 

Cut the pipe square removing rough edges and debris. Mark the pipe to the correct insertion depth.



**PUSH** 

Push pipe and fitting together up to the depth mark.



DONE.



Using the disconnect clip, fittings can be easily changed, removed and reused.







QTY/BAG



	PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG	
45°	STREET ELBOWS			
1/2"	x 1/2" CTS Tail Adapter (CTS end inserts into any 1/2" SB fitting)	U615LF	6	
3/4"	x 3/4" CTS Tail Adapter (CTS end inserts into any 3/4" SB fitting)	U620LF	6	
æ	1-1/4" X 1-1/4" (For PEX applications, stiffeners are sold separately)	SB0735	1	
LARGE DIAMETER	1-1/2" X 1-1/2" (For PEX applications, stiffeners are sold separately)	SB0741	1	
_ 5	2" X 2" (For PEX applications, stiffeners are sold separately)	SB0754	1	
FEM	ALE ELBOWS			
1/2"	X 1/2" FNPT	U308LF	6	
3/4"	X 3/4" FNPT	U314LF	3	
MAL	E ELBOWS			
1/2"	X 1/2" MNPT	U280LF	6	
3/4"	X 3/4" MNPT	U286LF	6	
RED	UCING ELBOWS			
1/2"	X 3/8" (1/2" OD)	U272LF	12	
3/4"	X 1/2"	U274LF	6	
1" X 3	1/4"	U278LF	3	
DRO	P-EAR ELBOWS			
3/8"	(1/2" OD) X 1/2" FNPT	U332LF	6	
1/2"	X 1/2"	U249LF	12	
1/2"	X 1/2" FNPT	U334LF	6	
3/4"	X 3/4" FNPT	U340LF	6	
HY-E	AR EAR ELBOWS			
1/2"	X 1/2" Hy-Ear	U335LF	6	
DISH	IWASHER ELBOWS			
1/4"	(3/8" OD) X 3/8" MNPT	U276LF	6	
	(3/8" OD) X 3/4" Garden Hose Nut	U2276LF	6	
1/2"	X 3/8" MNPT	U281LF	6	
TEES				
	(3/8" OD) X 1/4" (3/8" OD) X 1/4" (3/8" OD)	U358LF	6	
-	(1/2" OD) X 3/8" (1/2" OD) X 3/8" (1/2" OD)	U360LF	6	
	X 1/2" X 1/2"	U362LF	12	
	X 3/4" X 3/4"	U370LF	6	
1" X 1	" X 1"	U374LF	3	
TER TER	1-1/4" X 1-1/4" X 1-1/4"	SB0835	1	
LARGE DIAMETER	1-1/2" x 1-1/2" X 1-1/2"	SB0841	1	
	2" X 2" X 2"	SB0854	1	
REDUCING TEES				
	(1/2" OD) X 3/8" (1/2" OD) X 1/2"	U364LF	6	
	X 1/2" X 1/4" (3/8" OD)	U359LF	6	
	X 1/2" X 3/8" (1/2" OD)	U363LF	6	
	X 1/2" X 1/2"	U454LF	6	
	X 3/4" X 1/2"	U412LF	6	
_	X 1/2" X 3/4"	U444LF	6	
1" X 1	" X 3/4"	U416LF	3	





	PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG			
	1-1/4" X 1-1/4" X 1/2"	SB08353516	1			
	1-1/4" X 1-1/4" X 3/4"	SB08353522	1			
	1-1/4" X 1-1/4" X 1"	SB08353528	1			
	1-1/2" X 1-1/2" X 3/4"	SB08414122	1			
LARGE DIAMETER	1-1/2" X 1-1/2" X 1"	SB08414128	1			
DA	1-1/2" X 1-1/2" X 1-1/4"	SB08414135	1			
	2" X 2" X 1"	SB08545428	1			
	2" X 2" X 1-1/4"	SB08545435	1			
	2" X 2" X 1-1/2"	SB08545441	1			
FEM	ALE CENTER TEES					
3/4":	x 3/4" x 3/4" (Utilizes a U766LF thread adapter)	U462LF	3			
1" x 1	" x 1" (Utilizes a U772LF thread adapter)	U464LF	3			
	TEES (SLIP END ONLY SUITABLE FOR COPPER AND CPVC)		-			
	X 1/2" X 1/2"	U3362LF	3			
3/4"	X 3/4" X 3/4"	U3370LF	3			
	1-1/4" X 1-1/4" (For PEX applications, stiffeners are sold separately)	SB0335	1			
LARGE	1-1/2" X 1-1/2" (For PEX applications, stiffeners are sold separately)	SB0341	1			
1/6	2" X 2" (For PEX applications, stiffeners are sold separately)	SB0354	1			
FEM	ALE CENTER SLIP TEES (SLIP END ONLY SUITABLE FOR COPPER ANI	D CPVC)				
1/2"	X 1/2" X 1/2" FNPT	U3482LF	3			
3/4"	X 3/4" X 3/4" FNPT	U3486LF	3			
SER	VICE SLIP TEE ADAPTER (SLIP END ONLY SUITABLE FOR COPPER AN	ID CPVC)				
1/2"	X 1/2" X 1/2" CTS Tail Adapter Service Line Tee (CTS end inserts into any 1/2" SB fitting)	U4482LF	6			
RED	UCING SLIP TEES (ONLY SUITABLE FOR COPPER AND CPVC-MIDDLE BRANCH MAY BE US	ED WITH PEX)				
	1-1/4" X 1-1/4" X 1/2" (For PEX applications, stiffeners are sold separately)	SB03353516	1			
	1-1/4" X 1-1/4" X 3/4" (For PEX applications, stiffeners are sold separately)	SB03353522	1			
	1-1/4" X 1-1/4" X 1" (For PEX applications, stiffeners are sold separately)	SB03353528	1			
#	1-1/2" X 1-1/2" X 3/4" (For PEX applications, stiffeners are sold separately)	SB03414122	1			
LARGE DIAMETER	1-1/2" X 1-1/2" X 1" (For PEX applications, stiffeners are sold separately)	SB03414128	1			
۵	1-1/2" X 1-1/2" X 1-1/4" (For PEX applications, stiffeners are sold separately)	SB03414135	1			
	2" X 2" X 1" (For PEX applications, stiffeners are sold separately)	SB03545428	1			
	2" X 2" X 1-1/4" (For PEX applications, stiffeners are sold separately)	SB03545435	1			
	2" X 2" X 1-1/2" (For PEX applications, stiffeners are sold separately)	SB03545441	1			
END	CAPS					
	(1/2" OD)	U512LF	6			
1/2"		U514LF	12			
3/4"		U518LF	6			
1"		U520LF	6			
TER T	1-1/4" (For PEX applications, stiffeners are sold separately)	SB0435	1			
LARGE DIAMETER	1-1/2" (For PEX applications, stiffeners are sold separately)	SB0441	1			
	2" (For PEX applications, stiffeners are sold separately)	SB0454	1			
	ING REDUCERS (USE TO CONNECT TO SMALLER PIPE SIZES)					
	(1/2" OD) X 1/2" CTS (CTS end inserts into any 1/2" SB fitting)	U719LF	6			
	(1/2" OD) X 3/4" CTS (CTS end inserts into any 3/4" SB fitting)	U721LF	6			
1/2"	2" X 1" CTS (CTS end inserts into any 1" SB fitting) U722LF 6					

PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG
3/4" X 1" CTS (CTS end inserts into any 1" SB fitting)	U724LF	6
WATER SOFTENER FITTING		
3/4" X 1" FIP	U086LF	12



1-B: RADIANT FITTINGS			
RADIANT FITTINGS (NON-POTABLE WATER APPLICATION)	RADIANT FITTINGS (NON-POTABLE WATER APPLICATION)		
Non-potable water application fittings are manufactured with standard DZR brass.			
5/8" X 5/8" Coupling	U012	6	
3/4" X 5/8" Reducing Coupling	U057	6	
5/8" X 3/4" MNPT Reducing Adapter	U126	6	
5/8" X 5/8" Elbow	U252	6	
3/4" X 5/8" Elbow	U273	6	
5/8" X 5/8" X 5/8" Tee	U366	6	
5/8" End Stop	U516	6	



1-C: TRANSITION FITTINGS			
POLYBUTYLENE TRANSITION COUPLINGS			
1/2" PB X 1/2" CTS	U4008LF	6	
3/4" PB X 3/4" CTS	U4016LF	6	
PVC TRANSITION COUPLINGS			
SharkBite PVC transition fittings connect Copper, PEX, CPVC, or PE-RT pipe to PVC pipe (Sch. 40, 80 unions, or glue.	and 120) without solder	ing, clamps,	
1/2" CTS X 1/2" PVC	UIP4008	6	
3/4" CTS X 3/4" PVC	UIP4016	6	
1" CTS X 1" PVC	UIP4020	3	
PVC TRANSITION SLIP TEES			
1/2" CTS X 1/2" CTS X 1/2" PVC	UIP363	3	
1/2" PVC X 1/2" PVC X 1/2" CTS	UIP364	3	
3/4" CTS X 3/4" CTS X 3/4" PVC	UIP371	3	
3/4" PVC X 3/4" PVC X 3/4" CTS	UIP372	3	
1" CTS X 1" CTS X 1" PVC	UIP375	3	
1" PVC X 1" PVC X 1" CTS	UIP376	3	
PVC SLIP COUPLINGS			
1/2" PVC X 1/2" PVC	UIP3008	3	
3/4" PVC X 3/4" PVC	UIP3016	3	
1" PVC X 1" PVC	UIP3020	2	
PVC MALE CONNECTORS			
1/2" PVC X 1/2" MNPT	UIP120	6	
3/4" PVC X 3/4" MNPT	UIP134	6	
1" PVC X 1" MNPT	UIP140	3	
PVC CAPS			
1/2"	UIP514	12	
3/4"	UIP518	12	
1"	UIP520	12	


























1-D: FIRE FITTINGS ONLY SUITABLE FOR USE WITH SHARKBITE PEX PIPE					
FIRE HORIZONTAL TEES	FIRE HORIZONTAL TEES				
3/4" x 3/4" x 1/2" FNPT	UF12128H	3			
1" x 3/4" x 1/2" FNPT	UF16128H	3			
1" x 1" x 1/2" FNPT	UF16168H	3			
FIRE VERTICAL TEES					
3/4" x 3/4" x 1/2" FNPT	UF12128V	3			
1" x 3/4" x 1/2" FNPT	UF16128V	3			
1" x 1" x 1/2" FNPT	UF16168V	3			
FIRE DROP-EAR ELBOWS					
3/4" x 1/2" FNPT	UF128U	3			
1" X 1/2" FNPT	UF168U	3			
FIRE THREADED FEMALE ADAPTERS					
3/4" X 1/2" FNPT	UF128S	3			
FIRE ANGLED ADAPTERS					
3/4" X 3/4" X 1/2" FNPT	UF12128A	3			
FIRE FEMALE ELBOWS					
3/4" X 1/2" FNPT Left	UF128L	3			
3/4" X 1/2" FNPT Right	UF128R	3			
1" X 1/2" FNPT Left	UF168L	3			
1" X 1/2" FNPT Right	UF168R	3			

#### 1-E: FLEX HOSES

The SharkBite flexible connectors are used in residential and commercial applications to easily connect pipe in any combination. The SharkBite fitting allows the installer to connect to Copper, CPVC and PEX pipe eliminating the need for an additional transition fitting.

#### STAINLESS STEEL BRAIDED WATER HEATER CONNECTORS

The SharkBite water heater connectors are used in residential and commercial applications to connect the hot and cold supply lines to the water heater. The connectors are available in 12" 15" 18" and 24" lengths (with and without hall valve).

to the water heater. The connectors are available in 12 , 15 , 18 and 24 lengths (with and without ball valve).		
1/2" X 3/4" FIP, 12"	U3068FLEX12LF	12
1/2" X 3/4" FIP, 15"	U3068FLEX15LF	12
1/2" X 3/4" FIP, 18"	U3068FLEX18LF	12
1/2" X 3/4" FIP, 24"	U3068FLEX24LF	12
3/4" X 3/4" FIP, 12"	U3088FLEX12LF	12
3/4" X 3/4" FIP, 15"	U3088FLEX15LF	12
3/4" X 3/4" FIP, 18"	U3088FLEX18LF	12
3/4" X 3/4" FIP, 24"	U3088FLEX24LF	12
STAINLESS STEEL CORRUGATED WATER HEATER CONNECTORS		
3/4" X 3/4" FIP, 12"	SS3088FLEX12LF	12
3/4" X 3/4" FIP, 18"	SS3088FLEX18LF	12
3/4" X 3/4" FIP, 24"	SS3088FLEX24LF	12



PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG	
3/4" x 1" FIP, 24"	SS3086FLEX24LF	6	
1" x 1" FIP, 24"	SS3094FLEX24LF	6	
1" x 3/4" FIP, 24"	SS3096FLEX24LF	6	
STAINLESS STEEL BRAIDED WATER HEATER CONNECTORS WITH BALL V	ALVES	-	
1/2" X 3/4" FIP, 18"	U3068FLEX18BVLF	12	
3/4" X 3/4" FIP, 18"	U3088FLEX18BVLF	12	
STAINLESS STEEL CORRUGATED WATER HEATER CONNECTORS WITH BA	LL VALVES		
1/2" X 3/4" FIP, 18"	SS3068FLEX18BV	12	
3/4" X 3/4" FIP, 18"	SS3088FLEX18BV	12	
STAINLESS STEEL CORRUGATED WATER HEATER CONNECTORS KIT			
Kit contains one 3/4" FIP x 3/4" SB x 18" hose, one 3/4" FIP x 3/4" SB ball valve x 18" hose, and one 3/4" disconnect clip  24680			
STAINLESS STEEL BRAIDED WATER COUPLING HOSE			
1/2" X 1/2", 18"	U3008FLEX18LF	12	
3/4" X 3/4", 18"	U3016FLEX18LF	12	
STAINLESS STEEL BRAIDED WATER SOFTENER CONNECTOR			
The SharkBite water softener hose can be used for connection of new water softeners or replacement of existing connectors.  The 3/4" SharkBite x 1" FIP swivel nut connectors makes for quick and easy installation.			
3/4" X 1" FIP, 24"	U3086FLEX24LF	6	

#### 1-F: STOPS & FIXTURE SUPPLY FITTINGS


Connecting supply lines to fixtures and appliances using SharkBite stops & fixture supply fittings brings the speed and convenience of push-to-connect connections to the final phase of your plumbing jobs. Regular and chrome plated fittings are now available, including the newest 1/2" X 1/4" (3/8" OD) SharkBite stop valves. Stops in 1/2" X 3/8" or 1/4" compression sizes are also available. With these SharkBite push-to-connect fittings, stop valves and the 5' lengths or 50' coils of 1/4" (3/8" OD) PEX pipe, it's easy to make risers the exact length needed for connecting fixtures and appliances. No more problems with flexible lines that are too long or too short.

ANGLE STOPS		
1/2" X 3/8" Compression	23036-0000LF	12
1/2" X 3/8" Compression Loose Key	24731LF	6
1/2" X 1/4" (3/8" OD)	23048-0000LF	6
1/2" X 1/4" (3/8" OD) Loose Key	24733LF	6
1/2" X 1/4" Compression	23336-0000LF	6
1/2" X 1/2" Compression	23489	6
STRAIGHT STOPS		
1/2" X 3/8" Compression	23037-0000LF	12
1/2" X 3/8" Compression Loose Key	24732LF	6
1/2" X 1/4" (3/8" OD)	23049-0000LF	6
1/2" X 1/4" (3/8" OD) Loose Key	24734LF	6
1/2" X 1/4" Compression	23337-0000LF	6
1/2" X 1/2" Compression	23490	6
TEE STOPS		
1/2" X 1/2" X 1/4" Compression	24983	6
1/2" X 1/2" X 3/8" Compression	24984	6
3/4" X 3/4" X 1/4" Compression	24985	6





PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG	
3/4" X 3/4" X 3/8" Compression	24986	6	
1/2" X 1/2" X 1/4" (3/8" OD)	24987	6	
DUAL OUTLET STOP			
1/2" Angle Stop X 3/8" X 3/8" OD Comp Dual Outlet Stop	25558LF	6	
DUAL TEE STOP VALVE ADAPTERS			
Insert onto stub-out then fit any of the eight SharkBite stop valves to create any combination desir	ed.		
1/2" CTS X $1/2$ " CTS X $1/2$ " (CTS ends insert into any $1/2$ " SB fitting. Recommended use with Angle/Straight Stops.)	U782LF	6	
STOP VALVE CONNECTORS			
1/4" (3/8" OD) X 3/8" Compression Stop Valve Connector (Converts 3/8" comp stop to SharkBite)	U3523LF	6	
1/4" (3/8" OD) X 1/4" Compression Nut	U3524LF	6	
STOP VALVE TEE ADAPTERS			
1/4" (3/8" OD) X 1/4" (3/8" OD) X 3/8" Compression	U3358LF	6	
1/4" (3/8" OD) X 1/4" (3/8" OD) X 1/4" (3/8" OD) Tube	U4358LF	6	
FAUCET CONNECTORS			
1/4" (3/8" OD) X 1/2" NPSM	U3525LF	6	
TOILET CONNECTORS			
1/4" (3/8" OD) X 7/8" Ballcock Threads Toilet Connector	U3531LF	6	
1/4" (3/8" OD) X 7/8" Ballcock Threads Toilet Elbow	U3537LF	6	
ANGLE STOP SUPPLY LINES			
1/2" X 7/8" Ballcock Click Seal® Toilet Connector x 12"*	24656	6	
1/2" X 1/2" NPSM ClickSeal® Faucet Connector x 20"*	24657	6	



#### 1-G: ADDITIONAL PRODUCTS

#### **MANIFOLDS WITH PUSH-TO-CONNECT BRANCHES**

Manifolds are traditionally used in PEX systems, but this SharkBite manifold will also allow for easy incorporation into Copper or CPVC systems. Use SharkBite push-to-connect fittings to install these manifolds anywhere in a plumbing system. All manifolds have a 1" trunk with 3/4" tube inlets and outlets and 1/2" push-to-connect ports (2" on center).

a 1" trunk with $3/4$ " tube inlets and outlets and $1/2$ " push-to-connect ports (2" on center).		
Manifold Bracket Set (for 1"-1.5" diameter manifolds)	25484Z	1
3/4" x 1/2" Outlet 3-Port Manifold - Open	25552LF	3
3/4" x 1/2" Outlet 3-Port Manifold - Closed	25553LF	3
3/4" x 1/2" Outlet 4-Port Manifold - Open	25554LF	3
3/4" x 1/2" Outlet 4-Port Manifold - Closed	25555LF	3
RADIANT HEATING MANIFOLDS (1" FNPT X 1/2" SHARKBITE PEX LOOPS)		
3 Loop	24930	1
4 Loop	24931	1
5 Loop	24932	1
6 Loop	24933	1
7 Loop	24934	1
8 Loop	24935	1
9 Loop	24936	1
10 Loop	24937	1
11 Loop	24938	1
12 Loop	24939	1
13 Loop	24940	1

<sup>\*</sup>Click Seal® is a registered trademark of Fluidmaster, Inc.

PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG	
SHARKBITE RADIANT MANIFOLD ACTUATORS (4-WIRE, WITH END SWITCH)			
SharkBite Radiant Manifold Actuator	24963	1	
WATER HAMMER ARRESTORS			
Provides maintenance-free, continuous protection against water hammer. Can be posi connectors allow the arrestor to be installed in seconds, even on wet pipe.	itioned vertically or horizontally and t	ne SHARKBITE	
1/2" Residential	22630LF	1	
1/2" Commercial	22631LF	1	
3/4" Residential	22632LF	1	
1" Commercial	22633LF	1	
STUB OUT ELBOWS			
The SharkBite stub-out elbows come with pre-fitted mounting brackets that provide for (studs, joists and subfloors) by simply rotating or repositioning the mounting bracket.		rooden surfaces	
1/2" SB X 1/2" Copper Tube 8" Length	U351LFA	6	
PRESSURE GAUGES			
1/2" SB Tee with Pressure Gauge	24436	1	
3/4" SB Tee with Pressure Gauge	24438	1	
3/4" SB Pressure Gauge in Retail Packaging	24438A	5	
1" SB Tee with Pressure Gauge	24440	1	
1/2" CTS Pressure Gauge (inserts into any 1/2" SB fitting)	24442	1	
3/4" CTS Pressure Gauge (inserts into any 3/4" SB fitting)	24444	1	
TEMPERATURE GAUGES			
1/2" SB Tee with Temperature Gauge	24437	1	
3/4" SB Tee with Temperature Gauge	24439	1	
1" SB Tee with Temperature Gauge	24441	1	
1/2" CTS Temperature Gauge (inserts into any 1/2" SB fitting)	24443	1	
3/4" CTS Temperature Gauge (inserts into any 3/4" SB fitting)	24445	1	
PUSH-TO-CONNECT HOME RUN MANIFOLDS			
12 Port with Brass Valves	PM012SB	1	
24 Port with Brass Valves	PM024SB	1	

1-H: KITS			
WATER HEATER INSTALLATION KITS (KITS INCLUDE 2 SHARKBITE CONNECTOR FITTIN	GS AND A DISCONNECT C	LIP)	
1/2" X 3/4" FNPT	22604LF	12	
3/4" X 3/4" FNPT	22441LF	12	
CONTRACTOR KITS (KIT INCLUDES TOOLBOX)			
Kit Contains 2 each (U008LF, U016LF, U058LF, U072LF, U088LF, U120LF, U134LF, U248LF, U256LF) and 1 each (U362LF, U370LF, U514LF, U518LF, U710, U711, U713 and U702)	22486LF	1	
Contractor Tool Box Only	U3001A	1	
FAUCET CONNECTION KIT IN BAGGED PACKAGING (FAUCET KITS COME WITH 2 FAUCET CONNECTORS, 2 ANGLE STOPS, AND 1 COIL OF 10' 1/4" WHITE PEX PIPE)			
Faucet Connector with Angle Stop	25087	3	
Faucet Connector with Straight Stop	25538	3	
<b>TOILET CONNECTION KIT IN BAGGED PACKAGING</b> (TOILET KITS COME WITH 1 TOILET CONNECTOR, 1 ANGLE STOP, AND 1 COIL OF 5' 1/4" WHITE PEX PIPE.)			
Toilet Connector with Angle Stop	25088	6	
Toilet Connector with Straight Stop	25539	3	





PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG		
ICE MAKER CONNECTION KIT IN BAGGED PACKAGING (ICE MAKER KITS COME WITH 1 SERVICE SLIP TEE, 1 ANGLE STOP, 1 VALVE CONNECTOR, 10' 1/4" WHITE PEX PIPE)				
Ice Maker Connector with Angle Stop	25024	1		
<b>DISHWASHER INSTALLATION KIT IN BAGGED PACKAGING</b> (DISHWASHER KI STOP VALVE CONNECTOR, 1 DISHWASHER ELBOW, 1 GARDEN HOSE NUT)	T COMES WITH 1 DUAL O	JTLET STOP, 1		
Dishwasher Installation Kit	25568	3		
SHOWER/TUB INSTALLATION KIT IN BAGGED PACKAGING				
KIT Contains 2 Drop Ear Elbows, 2 Female Connectors, 2 Female Elbows and 1 Disconnect Clip	25567	3		
WATER FILTER INSTALLATION KIT IN BAGGED PACKAGING (WATER FILTER K CONNECTOR, AND 1 DISCONNECT (LIP)	(IT COMES WITH 1 SLIP CO	OUPLING, 1 MALE		
Kit Contains 1 - 3/4" Slip Connector, 1 - 3/4" Male Connector, and 1 - 3/4" Disconnect Clip	25561	6		
Kit Contains 1 - 1" Slip Connector, 1 - 1" Male Connector, and 1 - 1" Disconnect Clip	25562	6		
ICE MAKER OUTLET BOX				
1/2" SB X 1/4" Compression	25096	1		
1/2" SB X 1/4" Compression with Water Hammer Arrestor	25097	1		
WASHING MACHINE OUTLET BOX				
1/2" SB X 3/4" MHT	25098	1		
1/2" SB X 3/4" MHT with Water Hammer Arrestor	25099	1		
FACEPLATE REPLACEMENTS	_			
Ice Maker Box Replacement Faceplate for 25032, 25033, 25096, 25097	25478	1		
Washing Machine Box Replacement Faceplate for 24763, 25031, 25098, 25099	25464	1		
WASHING MACHINE VALVES				
1/2" X 3/4" MHT Straight Valve	25559LF	6		
1/2" X 3/4" MHT Angle Valve	25560LF	6		

	1-I: T00LS			
DEB	URR & GAUGE TOOLS			
Use fo	or 1/4", 3/8", 1/2", 5/8", 3/4" and 1" copper and CPVC pipe	U702	1	
LARGE DIAMETER	Use for 1-1/4", 1-1/2", 2"	SBG03	1	
DISC	ONNECT CLIPS			
1/4"		U706	12	
3/8"		U708	24	
1/2"		U710	24	
5/8"		U3712	24	
3/4"		U712	24	
1"		U714	12	
DISC	CONNECT TONGS			
1/2"		U711	1	
3/4"		U713	1	
1"		U715	1	
DE-MOUNT CLIPS				
	1-1/4"	SBDC35	1	
LARGE DIAMETER	1-1/2"	SBDC41	1	
LAF	2"	SBDC54	1	
	1-1/4", 1-1/2", 2" Kit	SBDC354154	1	

	PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG		
LAR	LARGE DIAMETER PEX STIFFENERS				
85	1-1/4"	SBTL35	1		
LARGE	1-1/2"	SBTL41	1		
	2"	SBTL54	1		
WRAP FOR FITTING BURIAL					
10′ x	2" X 0.02" Silicone Wrap	25406	1		

#### **SECTION 2: SHARKBITE VALVES**

#### 2-A: PRESSURE REGULATING VALVES

The innovative, labor reducing EB45 and the EB25 pressure regulating valves are available with double union and direct SharkBite connectors. The EB45 is factory set at 45 or 60 psi and is adjustable to 10-70 psi. The EB25 is set at 45 psi and features a twist cap with a numerical pressure indicator for easy one-man adjustment.

EB45 LEAD FREE SHARKBITE CONNECTIONS (ALL EB45 VALVES FACTORY SET AT 4	15 PSI UNLESS SPECIFIED)		
1/2" EB45-DSB Direct SharkBite	23807-0045	1	
1/2" EB45-SDSB Slip Feature Direct SharkBite	24383-0045	1	
1/2" EB45-DUSB Double Union SharkBite	23893-0045	1	
3/4" EB45-DSB Direct SharkBite	23808-0045	1	
3/4" EB45-SDSB Slip Feature Direct SharkBite	24384-0045	1	
3/4" EB45-DUSB Double Union SharkBite	23894-0045	1	
3/4" EB45 Double Union SharkBite (60 psi setting)	23896-0060	1	
3/4" EB45-DUSB Double Union SharkBite with Gauge	24449-0045	1	
1" EB45-DSB Direct SharkBite	22675-0045	1	
1" EB45-DUSB Double Union SharkBite	23358-0045	1	
1" EB45-DUSB Double Union SharkBite (60 psi setting)	23945-0060	1	
EB25 LEAD FREE SHARKBITE CONNECTIONS			
3/4" EB25-DUSB Double Union SharkBite	23955-0045	1	
1" EB25-DUSB Double Union SharkBite	23956-0045	1	
A-89 BOILER FEED VALVES			
1/2" A-89 Direct SharkBite	25521Z	1	
	·		

#### **2-B: THERMOSTATIC MIXING VALVES**

Direct or double union SharkBite push-to-connect connectors provide a simplified, time and labor saving installation. Heatguard® valves deliver water at a safe 120°F (49°C) or lower from all outlets, while allowing the thermostat to be set at a germ-killing 140°F (60°C) or higher which aids in preventing the growth of legionella bacteria in the water heater. The higher tank temperature means hot water demands can be satisfied longer. Every valve is tested for performance and includes a unique adjuster tool that minimizes tampering with the valve setting. Rugged, simple construction incorporates a precise engineered polymer piston and the latest in thermostatic technology.

<b>HG110-D LEAD FREE</b> (ASSE 1017, 1069, & 1070, CSA B 125.3. DISTRIBUTION AND IN-LINE)		
24548	1	
24549	1	
24504	1	
24505	1	
HG160 LEAD FREE (ASSE 1069 & 1070, CSA B 125.3. IN-LINE)		
24529	1	
24530	1	
	24548 24549 24504 24505 24529	





















PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG
HG110-HX		
3/4" HG110-HX with SharkBite Connections and Integral Checks	24867	1

2-C: BALL VALVES				
BAL	L VALVES			
1/2"	X 1/2"	22222-0000LF	12	
3/4"	X 3/4"	22185-0000LF	12	
1" X 1	11	22223-0000LF	6	
æ	1-1/4"	SBBV35	1	
LARGE	1-1/2"	SBBV41	1	
_ 5	2"	SBBV54	1	
BAL	L VALVES WITH FNPT CONNECTORS			
1/2"	X 1/2" FNPT	22182-0000LF	6	
3/4"	X 3/4" FNPT	22186-0000LF	6	
1" X 1	" FNPT	22187-0000LF	3	
BAL	L VALVES WITH DRAIN/VENT			
1/2"	x 1/2" x 1/8" NPSM Drain Thread	22304-0000LF	12	
3/4"	x 3/4" 1/8" NPSM Drain Thread	22305-0000LF	12	
1" x 1	" 1/8" NPSM Drain Thread	22306-0000LF	6	
BAL	L VALVE WITH DRAIN/VENT AND MOUNTING BRACKET			
1/2"	x 1/2" 1/8" NPSM Drain Thread	24615-0000LF	12	
3/4"	x 3/4" 1/8" NPSM Drain Thread	24616-0000LF	6	
1" x 1	" 1/8" NPSM Drain Thread	24617-0000LF	6	
1/8"	NPSM	24377	1	
SLIP BALL VALVE (ONLY SUITABLE FOR COPPER AND CPVC)				
1/2"	x 1/2"	24735LF	6	
3/4"	x 3/4"	24736LF	6	
1" x 1	11	24737LF	3	

2-D: PVC BALL VALVES			
PVC BALL VALVES			
3/4" PVC X 3/4" CTS	25550LF	6	
1" PVC X 3/4" CTS	25551LF	6	

2-E: CHECK VALVES			
CHECK VALVES			
1/2" X 1/2"	U2008-0000LF	6	
3/4" X 3/4"	U2016-0000LF	6	
1" X 1"	U2020-0000LF	3	
<b>DUAL CHECK VALVES</b> (ASSE 1024 & CSA B64.6)			
3/4" BF1, Dual Check, SharkBite Inlet & Outlet	BF13434SB	1	
1" BF1, Dual Check, SharkBite Inlet & Outlet	BF10101SB	1	
1" X 3/4" BF5, Dual Check, Meter Swivel Nut Inlet, SharkBite Outlet	BF5M0134SB	1	
1-1/4" X 1" BF5, Dual Check, Meter Swivel Nut Inlet, SharkBite Outlet	BF5M1401SB	1	

PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG	
2-F: TEMPERATURE & PRESSURE RELIEF VALVES			
T&P RELIEF VALVES			
3/4" NCLX-5LX with SharkBite Outlet Connection	24609-0150	1	

2-G: GENERAL SUPPLY VALVE	S	
GATE VALVE WITH DRAIN		
1/2" x 1/2"	24634LF	12
3/4" x 3/4"	24635LF	12
HOSE BIBBS		
1/2" x 3/4" MHT 90 Deg Hose Bibb — Quarter Turn	24620LF	6
3/4" x 3/4" MHT 90 Deg Hose Bibb — Quarter-Turn	24621LF	6
1/2" x 3/4"MHT 90 Deg Hose Bibb — Multi-Turn	24626LF	6
3/4" x 3/4" MHT 90 Deg Hose Bibb - Multi-Turn	24627LF	6
1/2" x 3/4" MHT No-Kink 45 Deg Hose Bibb — Quarter Turn	24630LF	6
3/4" x 3/4" MHT No-Kink 45 Deg Hose Bibb — Quarter-Turn	24631LF	6
1/2" x 3/4" MHT No-Kink 45 Deg Hose Bibb — Multi-Turn	24632LF	6
3/4" x 3/4" MHT No-Kink 45 Deg Hose Bibb - Multi-Turn	24633LF	6
GARDEN VALVES		
1/2" x 3/4" MHT	24622LF	6
3/4" x 3/4" MHT	24623LF	6
ANTI-SIPHON FROST-FREE SILLCOCK		
1/2" x 3/4" MHT 8"	24628LF	4
1/2" x 3/4" MHT 10"	24629LF	4
1/2" x 3/4" MHT 12"	24636LF	4
1/2" x 3/4" MHT 15"	24637LF	4
1/2" x 3/4" MHT 18"	24638LF	4




#### **3-A: PEX BARB CORE FITTINGS**

The SharkBite PEX/Barb Connection System is the best option for connecting PEX pipe in water distribution systems when lower material cost is desired. Robustly constructed with Lead Free DZR brass, the SharkBite barb fittings are corrosion resistant. With a wide range of fittings, manifolds, valves, clamp rings, crimp rings, ball valves and tools available, the SharkBite PEX/Barb Connection System is perfect for your next plumbing project.

COU	PLINGS		
3/8"	3/8"	UC006LF	10
1/2"	1/2"	UC008LF	25
5/8" :	5/8"	UC012LF	10
3/4"	3/4"	UC016LF	25
1" x 1		UCO20LF	10
8	1-1/4"	UC0135	20
LARGE DIAMETER	1-1/2"	UC0141	20
<u> </u>	2"	UC0154	15
RED	ICING COUPLINGS		
3/8"	1/2"	UC009LF	10
1/2"	3/4"	UC058LF	25



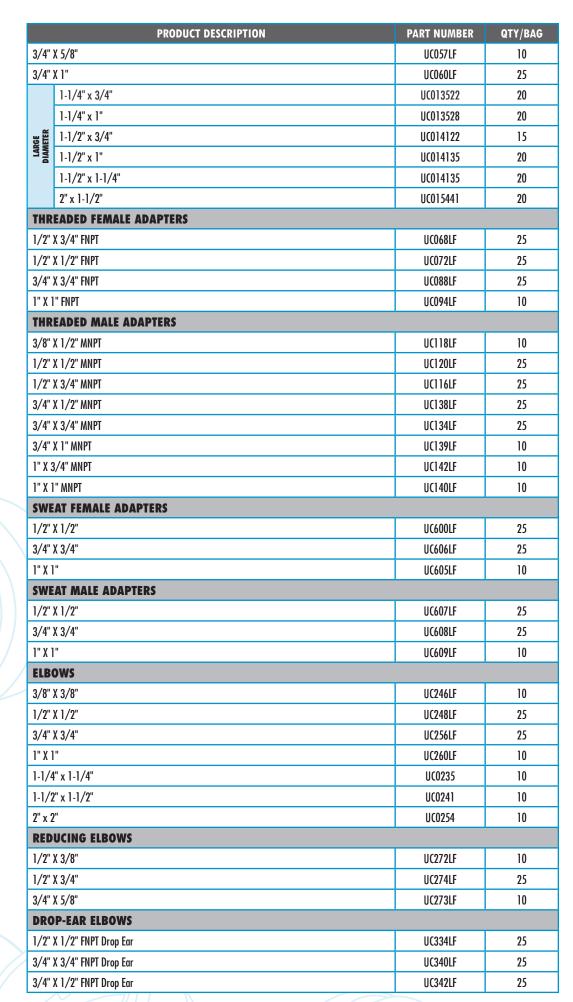



















	PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG
ADA	PTER ELBOWS		
1/2"	X 1/2" MNPT	UC280LF	25
1/2"	X 3/4" MNPT	UC278LF	25
3/4"	X 3/4" MNPT	UC286LF	25
3/4"	X 3/4" Female Sweat	UC626LF	25
3/4"	X 3/4" Male Sweat	UC628LF	25
TEES	3		
3/8"	X 3/8" X 3/8"	UC360LF	10
1/2"	X 1/2" X 1/2"	UC362LF	25
3/4"	X 3/4" X 3/4"	UC370LF	25
1" X	" X 1"	UC374LF	10
~	1-1/4"	UC0835	10
LARGE	1-1/2"	UC0841	5
1 2	2"	UC0854	5
BUL	LNOSE TEES		
1/2"	X 1/2" X 3/4" Bull Nose	UC408LF	25
3/4"	X 3/4" X 1" Bull Nose	UC413LF	10
RED	UCING TEES		
3/8"	X 3/8" X 1/2"	UC364LF	10
	X 3/8" X 3/8"	UC452LF	10
_	X 1/2" X 3/8"	UC363LF	10
	X 3/8" X 1/2"	UC434LF	10
	X 3/4" X 3/8"	UC417LF	10
	X 3/4" X 1/2"	UC412LF	25
	X 1/2" X 1/2"	UC454LF	25
	X 1/2" X 3/4"	UC444LF	25
	1/4" X 3/4"	UC414LF	10
	" X 1/2"	UC415LF	10
	" X 3/4"	UC416LF	10
	3/4" X 1"	UC418LF	10
	1-1/4" x 1" x 1"	UC08352828	10
	1-1/4" "x 1-1/4" x 1/2"	UC08353516	10
	1-1/4" x 1-1/4" x 3/4"	UC08353522	10
	1-1/4" x 1-1/4" x 1"	UC08353528	10
	1-1/2" x 1-1/2" x 1"	UC08413528	5
	1-1/2" x 1-1/2" x 1/2"	UC08414116	5
LARGE	1-1/2" x 1-1/2" x 3/4"	UC08414122	10
PA	1-1/2" x 1-1/2" x 1"'	UC08414128	5
	1-1/2" x 1-1/2" x 1-1/4"	UC08414135	5
	2" x 2" x 1/2"	UC08545416	5
	2" x 2" x 3/4"	UC08545422	5
	2" x 2" x 1"	UC08545428	5
	2" x 2" x 1-1/2"	UC08545441	
	Δ λ Δ λ I-1/ L	UCU0242441	5















	PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG
SWI	VEL ADAPTERS		
3/8"	X 3/8" NPSM	UC527LF	10
1/2"	X 1/2" NPSM	UC526LF	25
1/2"	X 3/4" NPSM	UC534LF	25
3/4"	X 3/4" NPSM	UC530LF	25
3/4"	X 1" NPSM	UC529LF	10
1" X 1	" NPSM	UC594LF	10
SWI	VEL ELBOWS		
3/8"	X 1/2" NPSM	UC531LF	10
1/2"	X 1/2" NPSM	UC532LF	25
SWI	VEL TOILET CONNECTION ELBOWS		
1/2"	X 7/8" BC Straight	UC528LF	10
3/8"	X 7/8" BC Elbow	23068LF	6
1/2"	X 7/8" BC Elbow	23067LF	6
PLU	GS		
3/8"		UC512LF	10
1/2"		UC514LF	25
3/4"		UC518LF	25
1"		UC520LF	10
æ	1-1/4"	UC0435	40
LARGE DIAMETER	1-1/2"	UC0441	30
_ 5	2"	UC0454	20



3-B: PEX BARB TRANSITION FITTINGS		
POLYBUTYLENE TRANSITION COUPLINGS (WITH PB CRIMP RING)		
3/8"	UC4006LF	10
1/2"	UC4008LF	25
3/4"	UC4016LF	25

#### **3-C: PEX BARB POLY ALLOY FITTINGS**

The SharkBite PEX poly alloy fittings range is an advanced plumbing solution when corrosion may effect DZR brass products.

,
)

COUPLINGS			
1/2" x 1/2"	UP008	25	
3/4" x 3/4"	UP016	25	
l"x l"	UP020	25	
REDUCING COUPLINGS			
3/4" X 1/2"	UP058	25	
1" X 3/4"	UP060	25	
CONNECTORS			
1/2" X 1/2" MNPT	UP120	25	
3/4" X 3/4" MNPT	UP134	25	
1" X 1" MNPT	UP140	25	
3/4" X 1/2" MNPT	UP138	25	

PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG	
ELBOWS			
1/2 x 1/2"	UP248	25	
3/4" x 3/4"	UP256	25	
l" x l"	UP260	25	
MALE ELBOWS		^	
1/2" X 1/2" MNPT	UP280	25	
REDUCING ELBOWS			
3/4" X 1/2"	UP274	25	
TEES			
3/8" x 3/8" x 3/8"	UP360	10	
1/2" x 1/2"x 1/2"	UP362	25	
3/4" x 3/4" x 3/4"	UP370	25	
l" x l" x l"	UP374	25	
REDUCING TEES			
1/2" X 1/2" X 3/4"	UP408	25	
3/4" X 1/2" X 1/2"	UP454	25	
3/4" X 3/4" X 1/2"	UP412	25	
3/4" X 1/2" X 3/4"	UP444	25	
1" X 3/4" X 3/4"	UP414	25	
1" X 1" X 1/2"	UP415	25	
1" X 1" X 3/4"	UP416	25	
PLUGS	·		
1/2"	UP514	25	
3/4"	UP518	25	
l"	UP520	25	
ADAPTERS			
1/2" x 1/2" NPSM	UP526	25	
3/8" x 1/2" NPSM	UP527	10	
1/2" x 1/2" NPSM Elbow	UP532	25	

3-D: PEX BAR	B FIRE FITTINGS	
FIRE HORIZONTAL TEES		
3/4" x 3/4" x 1/2" FNPT	UCF12128H	1
1" x 3/4" x 1/2" FNPT	UCF16128H	1
1" x 1" x 1/2" FNPT	UCF16168H	1
FIRE VERTICAL TEES		
3/4" x 3/4" x 1" FNPT	UCF12128V	1
1" x 3/4" x 1/2" FNPT	UCF16128V	1
1" x 1" x 1/2" FNPT	UCF16168V	1
FIRE DROP-EAR ELBOWS		
3/4" x 1/2" FNPT	UCF128U	1
1" X 1/2" FNPT	UCF168U	1
FIRE THREADED FEMALE ADAPTERS		
3/4" X 1/2" FNPT	UCF128S	1





PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG
FIRE ANGLED ADAPTERS		
3/4" X 3/4" X 1/2" FNPT	UCF12128A	1
FIRE FEMALE ELBOWS		
3/4" X 1/2" FNPT Left	UCF128L	1
3/4" X 1/2" FNPT Right	UCF128R	1
1" X 1/2" FNPT Left	UCF168L	1
1" X 1/2" FNPT Right	UCF168R	1



3-E: PEX BARB STOPS & FIXTURE SUPPLY FITTINGS			
PEX CHROME PLATED QUARTER TURN ANGLE STOPS			
1/2" X 3/8" OD Compression (Quarter Turn)	23058LF	24	
1/2" X 1/4" OD Compression (Quarter Turn)	23056LF	6	
PEX CHROME PLATED QUARTER TURN STRAIGHT STOPS			
3/8" X 3/8" (Quarter Turn)	23382LF	6	
1/2" X 3/8" OD Compression (Quarter Turn)	23057LF	24	
PEX CHROME PLATED STRAIGHT STOPS			
1/2" X 3/8" Compression	23059LF	24	
1/2" X 3/8"	23062LF	6	
1/2" X 1/2" MPT	23061LF	6	
1/2" X 1/2"	23063LF	12	
PEX CHROME PLATED ANGLE STOPS		^	
1/2" X 3/8" Compression	23060LF	12	
1/2" X 3/4" MHT	23064LF	6	
PEX CHROME PLATED ANGLE DUAL OUTLET STOPS			
1/2" X 3/8" X 3/8" Compression Angle Stop	23066LF	6	

3-F: PEX BARB ADDITIONAL PRODUCT	rs	
COPPER STUBOUT ELBOWS (ALL COPPER STUBOUT ELBOWS ARE LEAD FREE)		
1/2" X Closed (4" X 8")	22791	12
3/8" X 1/2" (4" X 4")	23069	6
1/2" X 1/2" (4" X 4")	23070	6
COPPER MANIFOLDS WITH BARB BRANCHES (1" TRUNK WITH 3/4" BARB INLETS ON CENTER) LEAD FREE	& OUTLETS AND 1/2" B	ARB PORTS - 2"
Manifold Bracket Set (for 1"-1.5" diameter manifolds)	25484Z	1
3 Port Closed	22783	1
3 Port Open	22784	1
4 Port Closed	22785	1
4 Port Open	22786	1
6 Port Closed	22787	1
6 Port Open	22788	1
8 Port Closed	22789	1
8 Port Open	22790	1
<b>WATER HAMMER ARRESTORS</b> (PROVIDES MAINTENANCE-FREE, CONTINUOUS PROTECT POSITIONED VERTICALLY OR HORIZONTALLY)	ION AGAINST WATER HAI	MMER. CAN BE
1/2" Residential	25401	1


PRODUCT DESCRIPTION	PART NUMBER	QTY/BAG
BARB HOME RUN MANIFOLDS		
Manifold 12 Port with Brass Ball Valves	RM22712	1
Manifold 24 Port with Brass Ball Valves	RM22724	1
Manifold 12 Port with Polly Ball Valves	PM012UP	1
Manifold 24 Port with Polly Ball Valves	PM024UP	1
BARB BALL VALVES		
1/2" x 1/2"	22461LF	12
3/4" x 3/4"	22462LF	12
l" x l"	22463LF	6



3-G: PEX BARB ACCESS	SORIES	
CLAMP RINGS (STAINLESS STEEL)		
3/8"	UC952	100
1/2"	UC953	100
5/8"	UC954	50
3/4"	UC955	100
1"	UC956	50
CRIMP RINGS (COPPER)		
3/8" (25 Pack)	23101CP25	6
3/8" (100 Pack)	23101CP100	6
1/2" (25 Pack)	23102CP25	24
1/2" (100 Pack)	23102CP100	6
3/4" (25 Pack)	23103CP25	12
3/4" (100 Pack)	23103CP100	6
1" (25 Pack)	23104CP25	6
CRIMP RINGS (COPPER)		
3/8"	23101	100
1/2"	23102	100
3/4"	23103	100
1"	23104	25
PEX BEND SUPPORTS, SUSPENSION CLAMPS AND INSULATO	DRS	
3/8" J Hook PEX Pipe Clamp (10 Pack)	23065	12
1/2" J Hook PEX Pipe Clamp (10 Pack)	23220	12
1/2" J Hook PEX Pipe Clamp (100 Pack)	23220Z100	5
3/4" J Hook PEX Pipe Clamp (10 Pack)	23221	12
1/2" Insulated Suspension Clamp (10 Pack)	23071A10	6
3/4" Insulated Suspension Clamp (10 Pack)	23072A10	6
1" Insulated Suspension Clamp (10 Pack)	23073A10	6
1/2" Pipe Insulator (10 Pack)	23074A10	6
3/4" Pipe Insulator (10 Pack)	23075A10	6
1" Pipe Insulator (10 Pack)	23076A10	6
1/2" Polymer Bend Support with mounting bracket	23050	12
3/4" Polymer Bend Support	23051	6
1/2" Metal Pipe Support	23053	12
3/4" Metal Pipe Support	23054	12









3-H: PEX BARB TOOLS		
PEX CRIMP TOOLS		
1/2", 3/4" PEX Combo Crimp Tool	23251	1
3/8", 1/2", 3/4" PEX Pocket Crimp Tool	23383	1
PEX CRIMP TOOL KIT		
3/8", 1/2", 3/4", 1" PEX Crimp Ring Tool Kit (Crimp Ring Gauge included)	23100	1
1-1/4", 1-1/2", 2" Crimp Tool	24675	1
PEX CLAMP TOOLS		
PEX Clamp Tool One-hand Operation	UC961	1
PEX Clamp Tool Standard Handles	23081	1
PEX PIPE CUTTER		
PEX Pipe Cutter	U701	1
CRIMP RING GAUGE		
3/8", 1/2", 3/4", 1" PEX Crimp Ring Gauge	23080	6
CRIMP RING REMOVAL TOOL		
PEX Crimp Ring Removal Tool	23055	6
PEX DECOILER		
PEX Decoiler	UFH034	1





#### Health/Safety

No glue, solder, or solvents required for the connection process, which keeps potentially dangerous chemicals out of plumbing systems. Additionally, SharkBite PEX Pipe eliminates the need for open flames in the house that could be a potential fire hazard. There is no risk of copper traces in water from breakdown of pipe that has been linked to heart disease and Alzheimer's.



#### Versatile

SharkBite PEX Pipe can be installed in dry or wet conditions.

SharkBite PEX Pipe can lend itself to many applications due to its physical properties of flexibility, reliability and installation ease such as hydronic heating, fire protection, etc.



#### **Chlorine Resistance**

SharkBite PEX Pipe is tested to the highest level of chlorine resistance standards, testing at 100% chlorine at 140°F.



#### **Proven and Guaranteed**

SharkBite PEX Pipe has been around for more than 35 years with over 12 Billion feet of pipe installed worldwide.



#### **Freeze Resistant**

SharkBite PEX Pipe is freeze resistant as the pipe can expand and contract as water freezes and thaws within the pipe.



Able to bend pipe around corners which removes the need for 45° or 90° elbows in certain situations. SharkBite's new coiling process increases the flexibility of our coiled pipe even more.



SharkBite PEX Pipe is substantially more cost effective than Copper pipe—SharkBite PEX Pipe costs a third of the price of Copper. SharkBite PEX Pipe is a fixed cost as prices don't fluctuate daily like Copper pipe.

#### **PROUDLY AMERICAN MADE**

#### **SHARKBITE PEX – CERTIFICATIONS**



NSF/ANSI 14 NSF/ANSI 61



**ASTM F 876** 



**ASTM F 877** 



**CSA B137.5** 



**AWWA C904** 



**UL 1821** 

# MADE IN THE

SharkBite PEX Pipe is an cost effective piping solution approved for use in both hot and cold plumbing installations. Meeting the highest chlorine resistance standards and utilizing the most energy efficient manufacturing processes, our PEX pipe is proudly produced in Alabama. We own our manufacturing process from start to finish, so every piece of SharkBite PEX Pipe is guaranteed from concept to delivery.


PEX pipe was introduced to North America in 1984 based on European market success, and was tested extensively for durability and material performance. All USA-installed PEX pipe must meet the qualification requirements as specified in the ASTM PEX Standards. SharkBite PEX Pipe can bend up to six times the outside diameter of the pipe—which is the maximum bend radius recommended by PEX pipe manufacturers.

SharkBite PEX Pipe can be used in a variety of applications including:

- Domestic plumbing
- Fire suppression systems (residential fire sprinklers)
- Municipal water service pipe for use in underground applications
- Radiant heating systems for suspended floor systems or in slab construction
- Snow and ice melt systems for sidewalks, driveways, entrances, and ramps
- Turf conditioning for greenhouses, golf courses, and sports fields
- · Water reuse and reclamations systems

DISCOVER THE FLEXIBILITY OF SHARKBITE PEX PIPE.



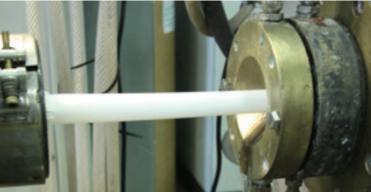



PACK/

#### **SECTION 4: SHARKBITE PEX PIPE**

SharkBite PEX Pipe is a cross-linked polyethylene pipe for use in a wide range of residential and commercial plumbing applications. Manufactured without an oxygen barrier for potable water systems and with an oxygen barrier for radiant floor and hydronic heating applications. A repeating SharkBite imprint pattern provides a visual aid to determine if the pipe has been inserted all the way into the SharkBite push-to-connect fitting. This feature only works if the pipe is cut between the SharkBite imprint pattern.

APPROVALS: The SharkBite pipe with and without oxygen barrier is approved for use in all model codes in the US and Canada, for use in hydronic and potable water systems, and is certified to the following standards: ASTM F876, ASTM F877, CSA B137.5 and AWWA C904.

4-A: POTABLE WATER PEX PIPE					
PEX PIPE (COILS)	WHITE	RED	BLUE		
1/4" (3/8" OD) 50′	U850W50			1	\$20.00
1/4" (3/8" OD) 100′	U850W100				\$40.00
3/8" 50′	U855W50			1	\$22.50
3/8" 100′	U855W100	U855R100	U855B100	1	\$45.00
1/2" 25′	U860W25W	U860R25W	U860B25W	1	\$12.50
1/2" 50′	U860W50W	U860R50W	U860B50W	1	\$25.00
1/2" 100′	U860W100W	U860R100W	U860B100W	1	\$50.00
1/2" 300′	U860W300W	U860R300W	U860B300W	1	\$150.00
1/2" 500′	U860W500W	U860R500W	U860B500W	1	\$250.00
1/2" 1000′	U860W1000W	U860R1000W	U860B1000W	1	\$500.00
3/4" 25′	U870W25W	U870R25W	U870B25W	1	\$22.50
3/4" 50'	U870W50W	U870R50W	U870B50W	1	\$45.00
3/4" 100′	U870W100W	U870R100W	U870B100W	1	\$90.00
3/4" 300′	U870W300W	U870R300W	U870B300W	1	\$270.00
3/4" 500'	U870W500W	U870R500W	U870B500W	1	\$450.00
1" 100'	U880W100W	U880R100W	U880B100W	1	\$160.00
1" 300'	U880W300W	U880R300W	U880B300W	1	\$480.00
1" 500′	U880W500W	U880R500W	U880B500W	1	\$800.00
1-1/4" 100′	U885W100			1	\$300.00
1-1/2" 100′	U890W100			1	\$450.00
2" 100'	U895W100			1	\$850.00
PEX PIPE (STRAIGHT LENGTHS)	WHITE	RED	BLUE		
1/4" (3/8" OD) 5'	U850W5			20	\$2.00
3/8" 5′	U855W5			10	\$2.25
3/8" 10′	U855W10			10	\$4.50
1/2" 2'	U860W2	U860R2	U860B2	60	\$2.00
1/2" 5'	U860W5	U860R5	U860B5	10	\$2.50
1/2" 10'	U860W10	U860R10	U860B10	10	\$5.00
1/2" 20'	U860W20	U860R20	U860B20	10	\$10.00
3/4" 2′	U870W2	U870R2	U870B2	30	\$3.60
3/4" 5′	U870W5	U870R5	U870B5	10	\$4.50
3/4" 10′	U870W10	U870R10	U870B10	10	\$9.00
3/4" 20′	U870W20	U870R20	U870B20	10	\$18.00
1" 5'	U880W5	U880R5	U880B5	5	\$8.00
1" 10'	U880W10	U880R10	U880B10	5	\$16.00

**SECTION 4: SHARKBITE PEX PIPE** 

PRODUCT DESCRIPTION	PART NUMBER	PART NUMBER	PART NUMBER	PACK/ QTY	LIST PRICE
1" 20'	U880W20	U880R20	U880B20	5	\$32.00
1-1/4" 20′	U885W20			5	\$60.00
1-1/2" 20′	U890W20			5	\$90.00
2" 20'	U895W20			3	\$170.00

2" 20'	U895W20			3	\$170.00
PRODUCT DESCR	RIPTION		PART NUMBER	PACK/ QTY	LIST PRICE
4-B: S	PECIAL APPLI	CATION PEX P	IPE		
RECLAIMED WATER PEX PIPE (PURPLE CO WATER APPLICATIONS AND SHALL NOT BE INSTALLED I			RECLAIMED		
SharkBite reclaimed water PEX is cross-linked polyethy tured with a purple color background, the pipe meets lines. SharkBite reclaimed water PEX is manufactured	color code requiremen	ts of national and state			
1/2" 100′			U860P100	1	\$60.00
1/2" 300′			U860P300	1	\$180.00
3/4" 100′			U870P100	1	\$110.00
3/4" 300′			U870P300	1	\$330.00
1" 100′			U880P100	1	\$190.00
1" 300′			U880P300	1	\$570.00
OXYGEN BARRIER PEX PIPE (ORANGE COI	LS)		OXYGEN BARRIER		
Use for radiant floor and hydronic heating application the pipe wall in hydronic heating applications. This pre				xygen perm	eation through
3/8" 100′			U8550100	1	\$70.00
3/8" 300′			U8550300	1	\$210.00
3/8" 500′			U8550500	1	\$350.00
1/2" 100′			U8600100	1	\$70.00
1/2" 300′			U8600300	1	\$210.00
1/2" 500′			U8600500	1	\$350.00
1/2" 1000′			U86001000	1	\$700.00
5/8" 300′			U8650300	1	\$300.00
3/4" 100′			U8700100	1	\$130.00
3/4" 300′			U8700300	1	\$390.00
3/4" 500′			U8700500	1	\$650.00
3/4" 1000′			U87001000	1	\$1,300.00
1" 100′			U8800100	1	\$225.00
1" 300′			U8800300	1	\$675.00
1" 500′			U8800500	1	\$1,125.00
OXYGEN BARRIER PEX PIPE (ORANGE STR	AIGHT LENGTHS)		OXYGEN BARRIER		
1/2" 20′			U860020	10	\$14.00
3/4" 20′			U870020	10	\$26.00
1" 20'			U880020	5	\$45.00
1" 20'			U880020	5	\$45.00



## **SHARKBITE**PUSH-TO-CONNECT FITTINGS

- The SharkBite push-to-connect range is made from Lead Free DZR brass and all products were converted as of October 2012.
- The standard material versions of SharkBite push-to-connect fittings are no longer in production, but we do continue to offer a small range of 5/8" fittings in standard material, specifically intended for radiant heating applications. As a running change, these fittings will be converted to Lead Free in due course.
- Our SharkBite 2XL large Diameter fittings have been Lead Free since their introduction in February 2011.

## SHARKBITE PEX/BARB FITTINGS

- Our PEX/barb range is made from Lead Free DZR brass and all products were converted as of October 2012.
- We have also implemented an extended range of engineered polymer barb fittings.



As of January 2014 a new Federal law came into effect that introduced a similar requirement across the whole country.

More information is available on our websites at: www.cashacme.com www.sharkbite.com

In this document, products are marked "Lead Free" or "Non-Potable" as applicable.

- "Lead Free" indicates that a product is suitable for use in an application that is anticipated or intended to deliver water for human consumption.
- "Non-Potable" designates that a product is only suitable for applications that are not anticipated or intended to deliver water for human consumption.

If a product is not marked "Lead Free" or "Non-Potable" it is either:

- Not designed to come into contact with water (e.g. tools, crimp rings, pipe hangers), or
- It is a replacement part or component for a valve or piece
  of Original Equipment, where it is necessary for the function
  of that valve or equipment to use the identical specification
  component with which it was originally designed and
  certified.

\* A device is defined as Lead Free if its wetted surface has a weighted average lead content not exceeding 0.25%.



### LIMITED WARRANTY

#### SHARKBITE® AND CASH ACME® PRODUCTS

#### WHAT DOES THIS WARRANTY COVER?

Subject to conditions outlined in this statement, RWC (in the USA, Reliance Worldwide Corporation and in Canada, Reliance Worldwide Corporation (Canada) Inc.) warrants to owners of real property in the United States and Canada that SharkBite and Cash Acme products, when used and installed in accordance with the requirements set forth, shall be free from defects in material and workmanship for the applicable Warranty Period. This Limited Warranty is in effect for installations made after January 1, 2016 and is applicable to products installed in the country in which they were purchased.

Proof of purchase is required to validate the Warranty Period. If proof of purchase is not available, the Warranty Period commencement shall default to the date of manufacture for each product. If the product suspected of a defect does not have a clear date of manufacture on it, a proof of purchase will be required.

#### WHAT ARE THE CONDITIONS OF THIS WARRANTY?

- All products must be installed in accordance with all then applicable codes, good plumbing practice, in accordance with any local, state, provincial or federal requirements, and installed in a potable water or radiant heating application unless a non-potable water service is specifically allowed for in the pertinent product literature.
- 2. The installer must use construction techniques compliant with then applicable codes to install the product and use the product within the design parameters specified in any installation guidelines and technical notes for the applicable system. This shall include field pressure testing prior to concealing with concrete or by other means and wrapping any brass fitting when buried. Failure to install RWC products according to manufacturer's installation instruction will void all applicable warranties and may result in severe water damage.
- 3. Products must at all times be used in a manner consistent with their intended use and be used in installations and environments acceptable to their material and design specifications, including not being installed in a system that may operate at temperatures or at pressures that exceed the approved ratings which can be found on the product, packaging or installation instructions.
- 4. Additional product specific conditions of this Limited Warranty and the Warranty Period are documented in the section entitled "HOW LONG DOES THE LIMITED WARRANTY COVERAGE LAST AND WHAT OTHER SPECIFIC CONDITIONS EXIST FOR EACH PRODUCT?". A condition for SharkBite Connection Systems is that the product must be installed by a licensed professional plumbing contractor.
- 5. Without limiting the foregoing, this Limited Warranty does not apply and you do not have a right of reimbursement if the product failure or resulting damage is caused by: (a) evidence of tampering, mishandling, neglect, abuse, accidental damage, freeze damage (it is expressly understood that failure as a result of any freezing fluids within the pipes does not constitute a defect in material or workmanship and shall not be covered by this warranty) or unauthorized modifications or repairs that cause damage to warranted products; (b) exposure to harmful, unauthorized, or unanticipated chemicals or substances or corrosive water conditions; (c) exposure to ultraviolet light; (d) faulty installation including failure to follow proper burial instructions; (e) damage from abnormal operating conditions including exposure pressures and temperatures beyond the specified operating range; (f) failure to properly test and pass common testing methods (including pressure testing) after the installation and before the product or system is put in service; (g) components not manufactured or sold by RWC; or (h) acts of nature such as earthquakes, fire, flood or lightning.
- 6. Although RWC provides a plumbing system to facilitate a complete installation, other manufacturers pipe and/or fittings may be installed in any given installation provided manufacturing of the pipe and/or fittings demonstrates compliance with the applicable ASTM/CSA standards, and the product has been certified by a recognized third-party testing agency. The RWC product in the given installation will continue to be covered under this Limited Warranty although limits on Warranty Period may apply. RWC will be responsible only for proven defects in material or workmanship in RWC products. Problems in products manufactured by another company should be reported to that manufacturer.

#### **HOW DO YOU GET SERVICE?**

In order to be eligible for service under this Limited Warranty you must return the defective product to RWC for inspection and testing within thirty (30) days after detection of alleged failure or defect occurring within applicable Warranty Period (with shipping charges prepaid) to the original place of purchase. If the alleged

defect involves a connection or joint with a RWC product, the fitting must be returned with a section of the pipe still inserted. You must include the model number of the product (if available), the original date of purchase, proof of purchase and the nature of the alleged product failure or defect. Products returned without shipping charges prepaid will be refused. For questions or inquiries, in the U.S. call 1(877)700-4242 and in Canada 1(888)820-0120.

#### WHAT WILL RWC DO?

If, after inspection, we find that a product covered by this Limited Warranty has failed due to a defect in material or workmanship during the specified Warranty Period, we will repair or replace, at our sole option, free of charge, the defective product during normal working hours and through a place of business as determined by RWC.

Notwithstanding anything to the contrary in this Limited Warranty, if RWC determines that any damages to the real property in which a defective product was installed were the direct result of a leak or failure caused by a defect in material or workmanship in any RWC product covered by this Limited Warranty and occurring within the first ten years after date of purchase or during the applicable Warranty Period, whichever is shorter, and if reasonable steps were taken to promptly limit or stop the effects of such leak or failure as soon as it was discovered, then RWC will reimburse the property owner for the reasonable costs of repairing or replacing such damaged real property to include flooring, drywall and painting and other real property damaged by the leak directly caused by the allegedly defective RWC product. Except as specified above or otherwise specifically authorized in writing by RWC, RWC shall not pay for any costs or expenses for transportation, relocation, labor, repairs or any other work associated with removing and/or returning failed or defective products or installing replacement products.

This shall constitute the sole and exclusive remedy for any defective product.

#### WHAT DOES THIS LIMITED WARRANTY NOT COVER?

RWC shall not be responsible for any other incidental, indirect, contingent, special or consequential damages, including without limitation, economic loss, lost profits or the cost of repairing or replacing other property which is damaged if these warranted products do not work properly, other costs resulting from labor charges, delays, vandalism, negligence, fouling caused by foreign material, damage from adverse water conditions, adverse chemical environments, or any other circumstances over which RWC has no control. This limitation applies even if RWC could have foreseen or has been advised of the possibility of these damages. This Limited Warranty shall be invalidated by any abuse, misuse, misapplication or improper installation of the product. Any remaining warranty coverage may not be assigned or transferred after the period ending ten years following the installation. RWC does not guarantee or in any way warrant the integrity or workmanship of the contractor/installer.

#### **MISCELLANEOUS**

Some States/Provinces do not allow limitations on how long an implied warranty lasts, and some States/Provinces do not allow the exclusion or limitation of incidental or consequential damages. Therefore, the above limitations may not apply to you. This Limited Warranty gives you specific legal rights, and you may have other rights that vary from State/Province to State/Province. You should consult applicable State/Provincial laws to determine your rights.

SO FAR AS IS CONSISTENT WITH APPLICABLE STATE/ PROVINCAL/ FEDERAL LAW, THE EXPRESS WARRANTY SET FORTH HEREIN IS THE ONLY WARRANTY GIVEN BY RWC WITH RESPECT TO THE SHARKBITE" AND CASH ACME" PRODUCTS AND RWC MAKES NO OTHER WARRANTIES, EXPRESSED OR IMPLIED, AND HEREBY SPECIFICALLY DISCLAIMS ALL OTHER WARRANTIES, EXPRESSED OR IMPLIED, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE.

This Limited Warranty and any claims arising from breach of contract, breach of warranty, tort, or any other claim arising from sale or use of RWC's products shall be governed and construed under the laws of the State of Georgia. No action on the part of RWC under this Limited Warranty shall be construed as an admission of liability of that the product is not fit for its intended use.

### HOW LONG DOES THE LIMITED WARRANTY COVERAGE LAST AND WHAT OTHER SPECIFIC CONDITIONS EXIST FOR EACH PRODUCT?

CLASSIFICATION	PRODUCT CATEGORY	LIMITED WARRANTY PERIOD	CONDITIONS
SharkBite Connection Systems	SharkBite Brass and Poly PEX Barb Fittings in conjunction with SharkBite PEX Pipe and SharkBite Rings/Clamps	Twenty-Five (25) Years	System must be installed by a licensed professional plumbing contractor and include:  • SharkBite PEX Pipe Only - ASTM F876/CSA B137.5  • SharkBite Copper Crimp Rings – ASTM F1807 or F2159  • Stainless Steel Clamp Rings – ASTM F2098
	SharkBite Universal Push-to-Connect Fittings and SharkBite 2XL Large Diameter Push- to-Connect Fittings in Application with Copper, PEX, CPVC and/or PE-RT	Twenty-Five (25) Years	Must be used with: Copper–ASTM B 88 hard drawn copper tube K, L, and M PEX–ASTM F876/CSA B137.5 CPVC–ASTM D2846 or CSA B137.6 PE-RT–ASTM F2769
	SharkBite Universal Push-to-Connect Fittings and SharkBite 2XL Large Diameter Push- to-Connect Fittings in Application with HDPE	Five (5) Years	Must be used with: • HDPE SDR-9 ASTM D2737
	SharkBite PEX Pipe	Twenty-Five (25) Years	Must be used with:  • ASSE 1061, ASTM F1807, ASTM F2098, and/or ASTM F2159 fittings
SharkBite and Cash Acme Products	SharkBite Brass PEX Barb Fittings/ Copper Manifold	Five (5) Years	Must be used with Non-SharkBite PEX Pipe and Clamps/Rings that conform to: • PEX – ASTM F876/CSA B137.5 • Copper Crimp Rings – ASTM F1807 • Stainless Steel Clamp Rings – ASTM F2098
	SharkBite Poly PEX Barb Fittings	Five (5) Years	Must be used with Non-SharkBite PEX Pipe and Clamps/Rings that conform to: • PEX – ASTM F876/CSA B137.5 • Copper Crimp Rings – ASTM F2159 • Stainless Steel Clamp Rings – ASTM F2098
	SharkBite Tools	One (1) Year	From date of purchase; used in accordance with instructions
	SharkBite and Cash Acme Thermostatic Mixing Valves	Five (5) Years	Must be installed per installation instructions
	Other SharkBite and Cash Acme Valves	Two (2) Years	Must be installed per installation instructions
	SharkBite Accessories (Ball Valves, Supply Hoses, Supply Stops, Supply Valve Box Systems, Kits, Manifolds, etc.)	Two (2) Years	Must be installed per installation instructions

Part Number Page	Part NumberPage	Part Number Page	Part Number Page	Part Number Page
22182-0000LF	23101CP100 19	24983 9	SB115450F 4	U3008LF 3
22185-0000LF13	23102 19	24984 9	SB115450M4	U308LF 5
22186-0000LF	23102CP25 19	24985 9	SBBV35	U3016FLEX18LF9
22187-0000LF	23102CP100 19	24986 9	SBBV41 13	U3016LF
22222-0000LF	23103	24987 9	SBBV54	U3020LF
22223-0000LF13	23103CP25 19	25024	SBDC35 12	U3068FLEX12LF 8
22304-0000LF13	23103CP100 19	25087 11	SBDC354154 12	U3068FLEX15LF8
22305-0000LF	23104 19	25088 11	SBDC41 12	U3068FLEX18BVLF8
22306-0000LF	23104CP25 19	25096	SBDC54 12	U3068FLEX18LF 8
22441LF 11	23220 19	25097	SBG0311	U3068FLEX24LF 8
22461LF 18	23221 19	25098 11	SBTL3512	U3086FLEX24LF9
22462LF 18	23251 20	25099	SBTL4112	U3088FLEX12LF8
22463LF 18	23336-0000LF9	25401 18	SBTL5412	U3088FLEX15LF8
22486LF 11	23337-0000LF9	25404	SS3068FLEX18BV9	U3088FLEX18BVLF8
22604LF	23358-004512	25406	SS3086FLEX24LF 8	U3088FLEX18LF8
22630LF 10	23382LF 18	RM2271618	SS3088FLEX18BV9	U3088FLEX24LF8
22631LF 10	23383 20	RM22720	SS3088FLEX18LF 8	U314LF 5
22632LF 10	23489 9	RM2272418	SS3088FLEX24LF 8	U332LF 5
22633LF 10	23490 9	SB0135 3	U004LF 3	U334LF 5
22675-0045	23807-0045	SB013528 3		U335LF 5
22783 18	23808-0045	SB0141 3	U006LF	U3358LF
22784	23893-0045	SB014128 3	U009LF	U3362LF 6
22785 18	23894-0045 12	SB014135 3	U0127	U3370LF 6
22786	23896-0060 12	SB0154 3	U016LF 3	U340LF 5
22787	23945-006012	SB015441 3	U020LF 3	U3482LF 6
22788 18	23955-004512	SB0235 4	U050LF 3	U3486LF 6
22789 18	23956-004512	SB0241 4	U057 7	U351LFA 10
22790 18	24383-004512	SB0254 4	U058LF 3	U3523LF 10
22791	24384-0045 12	SB0335 6	U060LF 3	U3524LF 10
22995LF 10	24436 11	SB03353516 6	U066LF 4	U3525LF 10
22996LF 10	24437 11	SB03353522 6	U068LF 4	U3531LF 10
22997LF 10	24438	SB03353528 6	U070LF 4	U3537LF 10
22998LF 10	24439	SB0341 6	U072LF 4	U358LF 5
23036-0000LF 9	24440	SB034141226	U086LF 6	U359LF 5
23037-0000LF 9	24441	SB03414128 6	U088LF 4	U360LF 5
23048-0000LF9	24442	SB03414135 6	U092LF 4	U362LF 5
23049-0000LF9	24443	SB0354 6	U094LF 4	U363LF 5
23050 19	24444	SB03545428 6	U110LF 4	U364LF 5
23051 19	24445	SB03545435 6	U116LF 4	U3667
23053 19	24449-0045	SB03545441 6	U118LF 4	U370LF 5
23054 19	24504	SB0435 6	U120LF 4	U371212
23055 20	24505	SB0441 6	U1267	U374LF 5
23056LF 18	24529	SB0454 6	U134LF 4	U4008LF
23057LF 18	24530	SB0535 4	U138LF 4	U4016LF 7
	24615-0000LF			U412LF 5
23058LF	24616-0000LF	SB0541 4 SB0554 4	U139LF 4 U140LF 4	U416LF 5
				U4358LF 10
23060LF	24617-0000LF	SB0635	U142LF 4 U2008-0000LF	U444LF 5
23062LF	24731LF 9	SB0654	U2016-0000LF	U4482LF 6
	24732LF 9	SB0735 4	U2020-0000LF	U454LF 5
23064LF	24733LF 9	SB0741 4	U2276LF 5	U462LF 6
23066LF 18	24734LF 9	SB0754 4	U244LF 4	U464LF 6
23065	24735LF	SB0835 5	U246LF 4	U512LF 6
23067LF 16	24736LF	SB08353516 5	U248LF 4	U514LF 6
23068LF 16	24737LF 13	SB08353522 5	U249LF 5	U5167
23069	24930	SB08353528 5	U2527	U518LF 6
23070 18	24931 10	SB0841 5	U256LF 4	U520LF 6
23071A10 19	24932 10	SB08414122 5	U260LF 4	U70120
23072A10 19	24933 10	SB08414128 5	U272LF 5	U70211
23073A10 19	24934 10	SB08414135 5	U2737	U70612
23074A10 19	24935 10	SB0854 5	U274LF 5	U70812
23075A10 19	24936 10	SB08545428 6	U276LF 5	U71012
23076A10 19	24937 10	SB08545435 6	U278LF 5	U71112
23080 20	24938 10	SB08545441 6	U280LF 5	U71212
23081 20	24939 10	SB113532F 4	U281LF 5	U71312
23100 20	24940 10	SB113532M4	U286LF 5	U71412
23101 19	24946 9	SB114140F 4	U3001A11	U71512
23101CP25 19	24947 9	SB114140M4	U3008FLEX18LF9	U719LF 6

Part Number Page	Part Number Page	Part Number Page	Part Number Page	Part NumberPage
U721LF 6	U870030023	UC118LF 14	UC96120	UP41217
U722LF 6	U870050023	UC120LF 14	UCF12128A 17	UP41417
U724LF 6	U8700100023	UC134LF 14	UCF12128H 17	UP41517
U766LF 4	U870P10023	UC138LF 14	UCF12128V 17	UP41617
U772LF 4	U870P30023	UC139LF 14	UCF128L 17	UP444 17
U782LF 9	U870R222	UC140LF 14	UCF128R 17	UP454 17
U850W522	U870R522	UC142LF 14	UCF128S 17	UP51417
U850W5022	U870R1022	UC246LF 14	UCF128U 17	UP51817
U850W10022	U870R2022	UC248LF 14	UCF16128H 17	UP520 17
U855010023	U870R25W22	UC256LF 14	UCF16128V 17	UP526 17
U855030023	U870R50W22	UC260LF 14	UCF16168H 17	UP527 17
U8550500 23	U870R100W 22	UC272LF 15	UCF16168V 17	UP532 17
U855B10022	U870R300W 22	UC273LF 15	UCF168L 17	
U855R10022	U870R500W22	UC274LF 15	UCF168R 17	
U855W522	U870W2 22	UC278LF 15	UCF168U 17	
U855W1022	U870W522	UC280LF 15	UF12128A 8	
U855W5022	U870W10 22	UC286LF 15	UF12128H8	
U855W10022	U870W20 22	UC334LF 15	UF12128V 8	
U860B222	U870W25W 22	UC340LF 15	UF128L 8	
U860B522	U870W50W 22	UC342LF 15	UF128R8	
U860B1022	U870W100W 22	UC360LF 15	UF128S 8	
U860B2022	U870W300W 22	UC362LF 15	UF128U8	
U860B25W22	U870W500W 22	UC363LF 15	UF16128H8	
U860B50W22	U880B522	UC364LF 15	UF16128V 8	
U860B100W 22	U880B1023	UC370LF 15	UF16168H8	
U860B300W 22	U880B2023	UC374LF 15	UF16168V 8	
U860B500W22	U880B100W 22	UC4006LF 16	UF168L 8	
U860B1000W 22	U880B300W 22	UC4008LF 16	UF168R8	
U86002023	U880B500W22	UC4016LF 16	UF168U8	
U860010023	U88002023	UC408LF 15	UFH03420	
U860030023	U880010023	UC412LF 15	UIP120 7	
U860050023	U880030023	UC413LF 15	UIP134 7	
U8600100023	U880050023	UC414LF 15	UIP140 7	
U860P10023	U880P10023	UC415LF 15	UIP3008 7	
U860P30023	U880P300 23	UC416LF 15	UIP3016 7	
860R2 22	U880R522	UC417LF 15	UIP3020 7	
860R5 22	U880R1023	UC418LF 15	UIP363 7	
860R10 22	U880R2023	UC434LF 15	UIP364 7	
860R20 22	U880R100W 22	UC444LF 15	UIP371 7	
U860R25W22	U880R300W 22	UC452LF 15	UIP372 7	
U860R50W22	U880R500W22	UC454LF 15	UIP375 7	
U860R100W 22	U880W522	UC512LF 16	UIP376 7	
U860R300W 22	U880W10 23	UC514LF 16	UIP4008 7	
U860R500W22	U880W20 23	UC518LF 16	UIP4016 7	
U860R1000W 22	U880W100W 22	UC520LF 16	UIP4020 7	
U860W2 22	U880W300W 22	UC526LF 15	UIP710 7	
U860W522	U880W500W 22	UC527LF 15	UIP712 7	
U860W10 22	U885W20 23	UC528LF 16	UIP714 7	
U860W20 22	U885W10022	UC529LF 15	UP008 16	
U860W25W 22	U890W20 23	UC530LF 15	UP01616	
U860W50W 22	U890W100 22	UC531LF 15	UP020 16	
U860W100W 22	U895W2023	UC532LF 15	UP058 16	
U860W300W 22	U895W10022	UC534LF 15	UP060 16	
U860W500W 22	UC006LF 14	UC594LF 15	UP120 16	
U860W1000W 22	UC008LF 14	UC600LF 14	UP13416	
U865030023	UC009LF 14	UC605LF	UP13816	
U870B222	UC012LF	UC606LF	UP14016	
U870B522	UC016LF 14	UC607LF 14	UP248 16	
U870B1022	UCO20LF	UC608LF	UP256 16	
U870B2022	UC057LF	UC609LF	UP260 16	
U870B25W	UC058LF	UC626LF 15	UP27416	
U870B50W	UC060LF	UC628LF	UP280 16	
U870B100W 22	UC068LF	UC952	UP360 16	
U870B300W 22	UC072LF	UC953	UP36216	
U870B500W	UC088LF	UC954	UP370 16	
U87002023	UC094LF	UC955	UP37416	
U870010023	UC116LF 14	UC956 19	UP408 17	



### CERTIFICATIONS

The SharkBite push-to-connect fittings have been certified and listed to ASSE 1061 and NSF/ANSI 61. The SharkBite push-to-connect fittings are listed by IAPMO and are certified for potable and hydronic heating water distribution (Note: Glycol mixture for hydronics is acceptable up to and including 100%). The SharkBite push-to-connect fittings have been certified for underground applications and as a manufactured joint without access panels and they meet UPC, IPC and cUPC requirements. Any SharkBite fitting listed as Lead Free is compliant with NSF/ANSI 372. Please consult with local plumbing codes concerning specific applications.

The SharkBite pipe without oxygen barrier is approved for all model codes in the US and Canada for use in potable water systems and is certified to the following standards: ASTM F 876, ASTM F 877, CSA B137.5 and AWWA C904.

The SharkBite pipe with oxygen barrier is approved for use in all model codes in the US and Canada for use in hydronic and potable water systems and is certified to the following standards: ASTM F 876, ASTM F 877, CSA B137.5 and AWWA C904.

Note: The SharkBite push-to-connect fittings are not approved for use with chrome-plated pipe. SharkBite Polybutylene couplings are designed to work with ASTM D3309 spec polybutylene, do not install onto damaged or decayed PB pipe.



**Reliance Worldwide Corporation** 



