

# Industrial Grade Extra Heavy Duty Ground Fault Receptacle Autoguard Self-Test GFCI 20A, Tamper-Resistant, Weather-Resistant

# HUBBELL

## Features

- Heavy duty robust construction, high impact resistant polyester housing
- Corrosion Resistant: nickel-plated face contacts, mounting strap, line/load terminals and terminal clamps, stainless steel screws
- Patented auto monitor, power denial technology



## Ordering Information

| Description   | Color | UPC Number   | Catalog Number |
|---|-------|--------------|----------------|
| 20A, 125V, Style Line, AUTOGUARD self test GFCI receptacle, tamper-resistant and weather-resistant, flush face, back and side wired | Black | 783585581101 | GF5362SGBK     |

## Listings

|   |  |
|---|--|
| UL Listed - Canadian and U.S.<br>Meets ADA Standard<br>Meets are NEC requirements | CSA Certified<br>Fed Spec<br>NEMA WD-6 Complaint |
|---|--|

## Specifications

|                |                       |                 |                     |
|----------------|-----------------------|-----------------|---------------------|
| Face           | Natural (white) nylon | Ground Contacts | Nickel Plated Brass |
| Base           | Clear polycarbonate   | Mounting Strap  | Nickel Plated Brass |
| Power Contacts | Nickel Plated Brass   | Mounting Screw  | Stainless Steel     |

## Performance


| Electrical   |                      |                |                         |
|--------------|----------------------|----------------|-------------------------|
| Amperage     | 20A                  | Flammability   | V0 per UL 94            |
| Feed-through | 20 Amp Protection    | Operating Temp | -35 C to 66 C           |
| Voltage      | 120V AC (-15%, +10%) | Trip Level     | 4 mA to 6mA (0.025 sec) |
| Frequency    | 60 Hz                | Short Circuit  | 10,000 Amps             |
| Dielectric   | Withstand 1,500V     |                |                         |

## Construction

|                       |                 |                   |              |
|-----------------------|-----------------|-------------------|--------------|
| Termination           | Back and Side   | Power Indicator   | Solid Green  |
| Terminal              | #14 to #10AWG   | GF/Trip Indicator | Solid Red    |
| Grounding             | Autoground Clip | End of Life       | Flashing Red |
| Printed Circuit Board | Conformal Coat  |                   |              |

## Certifications

|            |                      |             |                  |
|------------|----------------------|-------------|------------------|
| UL Listing | E41978 Fed Spec.     | NEC/CEC     | TR, WR Resistant |
| UL Std 498 | Receptacle           | CSA Listing | LR24886          |
| UL Std 943 | GFCI                 | CSA Std     | C22.2 No. 42     |
| UL Std 943 | Dust Protection      | CSA Tech    | No. M-02A        |
| UL 943     | Corrosion Resistance |             |                  |

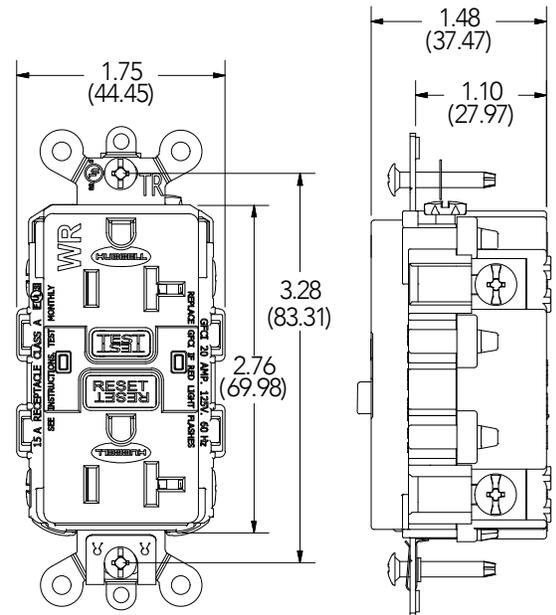

## Accessories

| Description                       |
|-----------------------------------|
| (1) Matching Nylon and            |
| (1) Stainless Wall Plate Included |

## Links

Customer Drawings  
Instruction Installations  
Media