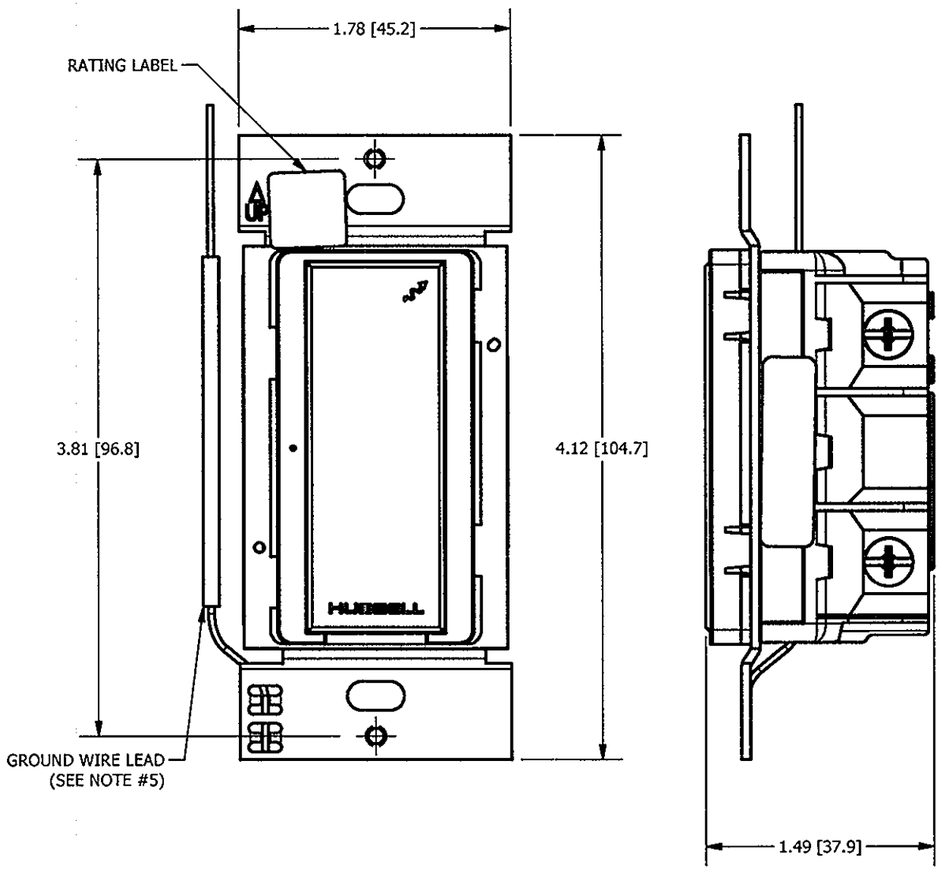

WIRING DIAGRAM

SINGLE LOCATION INSTALLATION

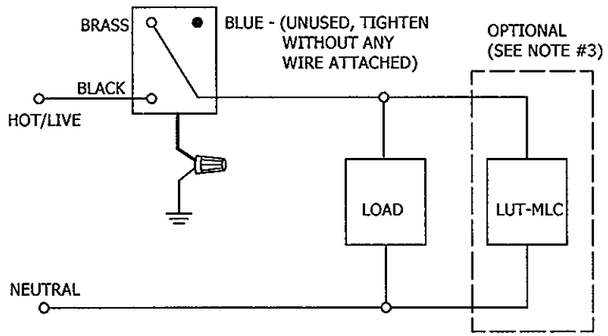

MULTI-LOCATION INSTALLATION (SEE NOTE #4)

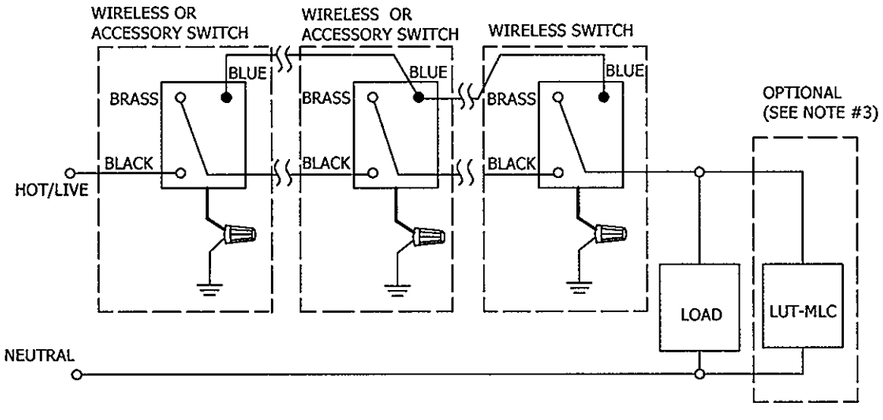

CAT. #	COLOR	VOLTAGE	LOAD TYPE	MIN. LOAD	MAX. LOAD		
					NOT GANGED	END OF GANG	MIDDLE OF GANG
WLS1278I	IVORY	120-277 VAC	INCANDESCENT/HALOGEN	25 W	8A	8A / 7A (SEE NOTE #2)	7A
		120-277 VAC	FLUORESCENT / LED/CFL	40W (LUT-MLC)	8A	8A / 7A (SEE NOTE #2)	7A
		120 VAC	FAN MOTOR	0.4A	1/10 HP, 3A	1/10HP, 3A	1/10 HP, 3A
WLS1278W	WHITE	SAME AS WLS1278I					

NOTES: (UNLESS OTHERWISE SPECIFIED)
1. ALL DIMENSIONS ARE IN INCHES [mm].
2. MAX. LOAD FOR DOUBLE GANG APPLICATION IS 8A, TRIPLE GANG APPLICATION DERATES MAX. LOAD TO 7A.
3. THE PROVIDED LUT-MLC ENSURES PROPER FUNCTION WITH CERTAIN FLUORESCENT, CFL, AND LED LOAD TYPES.
4. ACCESSORY SWITCH CAT.# WLAS120XX (SEE SHEET 2) OR WLAS277XX (SEE SHEET 3) MAY BE CONNECTED.
5. GROUND WIRE LEAD: 18 AWG, GREEN, 6" LENGTH.

CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
BASE	POLYESTER	
TOP	POLYESTER	
PUSH BUTTON	POLYESTER	
STRAP	ALUMINUM	
PCB	EPOXY RESIN	

SYM	DESCRIPTION	APPRO	DATE
1	NEW RELEASE PER DCN #18801	DL	04/18/12

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE DUAL VOLTAGE 8A WIRELESS & ACCESSORY SWITCH

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ±1/64
DECIMALS ±.005
ANGLES ±2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

DR. BY	DL	APP. BY	SAA
TR. BY		SCALE	1:1
CHK'D BY	SAA	DATE	1/18/2012

DIMENSION SHEET FOR CAT. NO. SEE TABLE

REPAIRABLE ☐ NON-REPAIRABLE ☒

B | M-12152 | 1

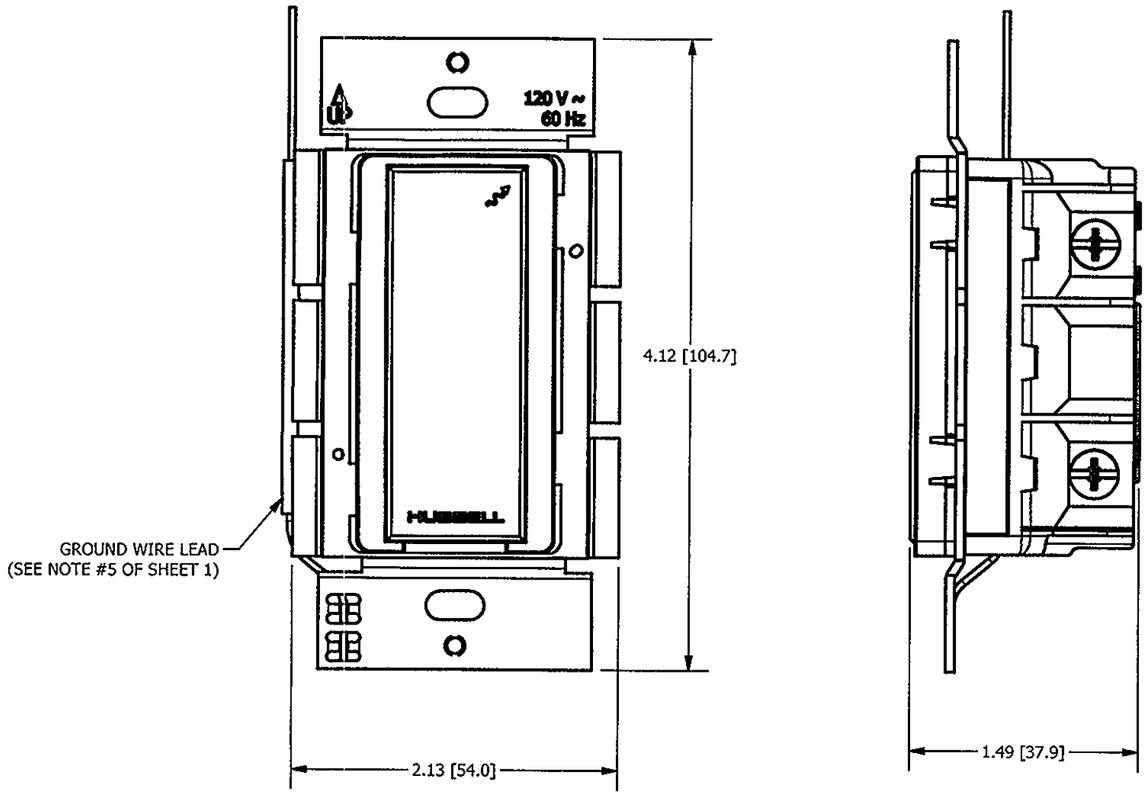

NOTES: (UNLESS OTHERWISE SPECIFIED)
1. ALL DIMENSIONS ARE IN INCHES [mm].
2. RATING: 120 VAC, 8.3A.
3. WIRING DIAGRAM SEE SHEET 1.

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
BASE	POLYESTER	
TOP	POLYESTER	
PUSH BUTTON	POLYESTER	
STRAP	ALUMINUM	
PCB	EPOXY RESIN	

SYM	DESCRIPTION	APP	DATE
1	NEW RELEASE PER DCN #18801	DL	04/18/12

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE DUAL VOLTAGE 8A WIRELESS & ACCESSORY SWITCH

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ±1/64
DECIMALS ±.005
ANGLES ±2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

DR. BY	DL	APP. BY	
TR. BY		SCALE	1:1
CHK'D BY		DATE	1/18/2012

DIMENSIONS ARE FOR REFERENCE ONLY

WLAS120I, WLAS120W

REPAIRABLE ☐ NON-REPAIRABLE ☒

B | M-12152 | 1

CODE 74545

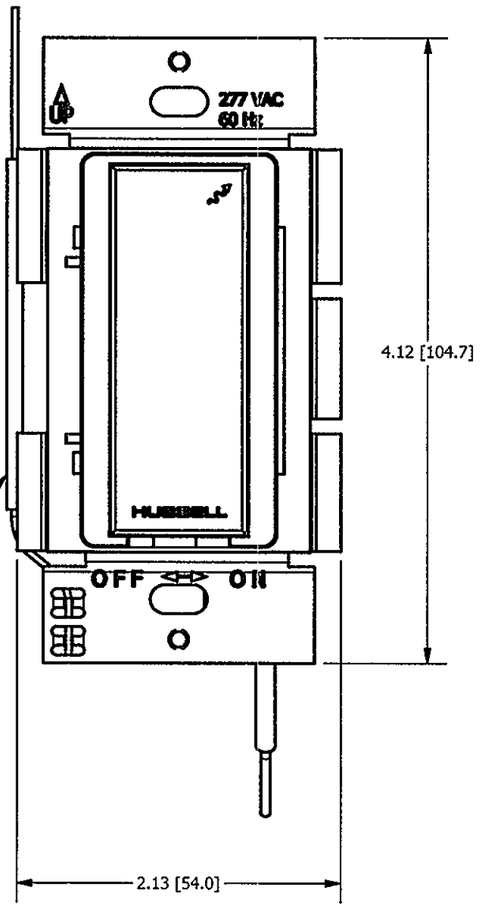

GROUND WIRE LEAD
(SEE NOTE #5 OF SHEET 1)

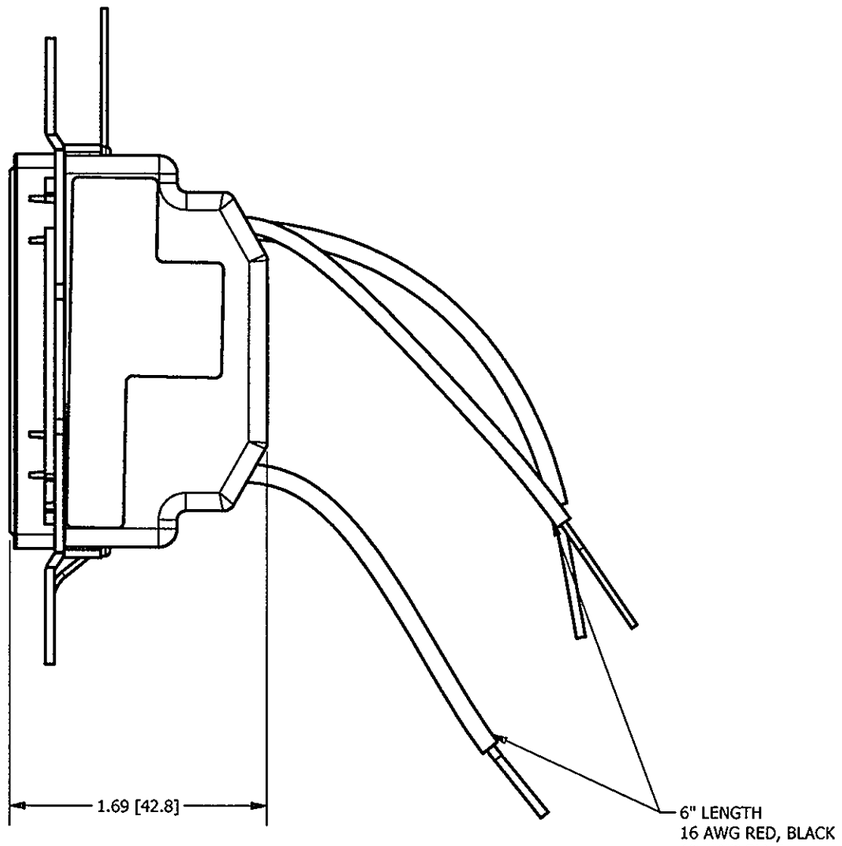

NOTES: (UNLESS OTHERWISE SPECIFIED)
1. ALL DIMENSIONS ARE IN INCHES [mm].
2. RATING: 277 VAC, 8.3A.
3. WIRING DIAGRAM SEE SHEET 1.

CODE 74545

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
BASE	POLYESTER	
TOP	POLYESTER	
PUSH BUTTON	POLYESTER	
STRAP	ALUMINUM	
PCB	EPOXY RESIN	

SYM	DESCRIPTION	APP	DATE
1	NEW RELEASE PER DCN #18801	DL	04/18/12

THE DESIGN AND DIMENSIONS OF THE PRODUCT SHOWN ON THIS DRAWING ARE SUBJECT TO CHANGE WITHOUT NOTICE

TITLE DUAL VOLTAGE 8A WIRELESS & ACCESSORY SWITCH

TOLERANCES UNLESS OTHERWISE SPECIFIED
FRACTIONS ±1/64
DECIMALS ±.005
ANGLES ±2°

WIRING DEVICE-KELLEMS
HUBBELL INCORPORATED
SHELTON, CT

DR. BY DL	APP. BY
TR. BY	SCALE 1:1
CHK'D BY	DATE 1/18/2012

DIMENSION SHEET FOR CAT. NO.
WLAS277I, WLAS277W
REPAIRABLE ☐ NON-REPAIRABLE ☒
B
M-12152
1