WIDESPREAD
Z831B4-XL-ICT
TAG _____

Engineering Specifications: Zurn AquaSpec® Z831B4-XL-ICT
Polished chrome-plated 8” [203mm] widespread with an 5-3/8” [137mm] centerline rigid or swing gooseneck spout and quarter turn ceramic disc cartridges. Unit is furnished with a 2.2 GPM [8.3 L] pressure compensating aerator (complying with ANSI A112.18.1 Standard for flow), 4” [102mm] vandal-resistant color-coded metal wrist blade handles, mounting hardware and 1/2" NPSM coupling nuts for standard lavatory risers. Widespread accommodates installations up to 1-1/8" [29mm] thick.
Zurn Lead Free products (-XL) is the line of durable, high quality brass faucets and fixtures that are designed and manufactured to comply with Section 1417 of the Safe Drinking Water Act (SDWA) which mandates the weighted average lead content of no more than 0.25% of the wetted surface.
This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.

ADA DESIGNED

XL LEAD FREE

WaterSense Meets EPA Criteria Certified by IAPMO R&T *

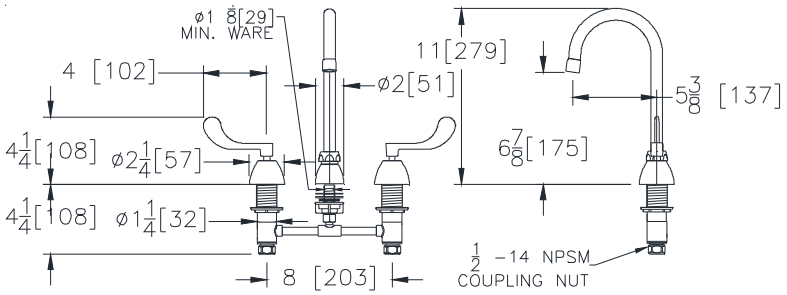

OPTIONAL ACCESSORIES

Note: *All dimensions are for reference only. Do not use for pre-plumbing*

Suffix	Description
☐ -85	85° Restricted Swing Spout
☐ -CWO	Cold Water Only
☐ -FC	2.0 GPM [7.6 L] Laminar Flow Control in Base of Spout
☐ -FC____	Plain End Spout with Flow Control in Base of Spout (Specify GPM Flow 0.5, 1.0, 1.5)
☐ -HS	Hose and Spray
☐ -G	1-1/4” [32mm] Grid Strainer Drain
☐ -GH	Offset Handicap Grid Drain
☐ -HCT	Hot/Cold Text Indexes
☐ -P	1-1/4”[32mm] Pop-up Drain
☐ -PT	1-1/4" [32mm] Cast Brass P-Trap with a 7-1/2" [191mm] Long 17-Gauge Wall Bend
☐ -TW	Third Waterway
☐ -140	140º Restricted Swing Spout
☐ -2F	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Aerator
☐ -3F	0.5 GPM [1.9 L] Vandal-Resistant Pressure Compensating Female Spray Outlet
☐ -4F	2.2 GPM [8.3 L] Vandal-Resistant Pressure Compensating Female Laminar Flow Outlet
☐ -5F	2.0 GPM [8.3 L] Rosette Spray
☐ -7F*	1.0 GPM [3.8L] Pressure Compensating Female Spray Outlet
☐ -16F	1.0 GPM [3.8L] Vandal-Resistant Pressure Compensating Female Spray Outlet
☐ -17F*	1.5 GPM [5.7L] Vandal-Resistant Pressure Compensating Female Aerator
☐ -18F*	1.5 GPM [5.7L] Vandal-Resistant Pressure Compensating Female Laminar Flow Outlet
☐ -19F*	1.5 GPM [5.7 L] Anti-Microbial Pressure Compensating Female Laminar Flow Outlet
☐ -21F	1.0 GPM [3.8L] Pressure Compensating Female Laminar Flow Outlet
☐ -22F	1.0 GPM [3.8L] Pressure Compensating Vandal-Resistant Female Laminar Flow Outlet
☐ -23F	1.5 GPM [5.7L] Pressure Compensating Female Aerator
☐ -24F	0.35 GPM [1.3 L] Pressure Compensating Female Spray Outlet
☐ -25F	0.35 GPM [1.3 L] Vandal-Resistant Pressure Compensating Female Spray Outlet

ZURN INDUSTRIES, LLC. ♦ COMMERCIAL BRASS OPERATION ♦ 5900 ELWIN BUCHANAN DRIVE ♦ SANFORD NC 27330
Phone: 1-800-997-3876 ♦ Fax: 919-775-3541 ♦ World Wide Web: www.zurn.com
In Canada: ZURN INDUSTRIES LIMITED ♦ 7900 Goreway Drive Unit 10 ♦ Brampton, Ontario L6T5W6 ♦ Phone: 905-405-8272 Fax: 905-405-1292

AquaSpec® is a registered trademark of Zurn Industries, LLC.