



LED BR30

7.2BR30/PER/927/P/E26/DIM 6/1FB T20

Philips BR30 LED lamps are the smart alternative to standard incandescent. The traditional lamp design can provide excellent dimming performance with spectacular energy savings. They provide the beautiful light and dependable performance you expect from LED at an economical price.

Product data

General Information	
Cap-Base	E26 [Single Contact Medium Screw]
EU RoHS compliant	Yes
Nominal Lifetime (Nom)	15000 h
Switching Cycle	50000X
Technical Type	7.2-65W
Light Technical	
Color Code	927
Beam Angle (Nom)	110 °
Luminous Flux (Nom)	650 lm
Color Designation	Warm White (WW)
Correlated Color Temperature (Nom)	2700 K
Luminous Efficacy (rated) (Nom)	90.00 lm/W
Color Consistency	<4
Color Rendering Index (Nom)	90
LLMF At End Of Nominal Lifetime (Nom)	70 %
Operating and Electrical	
Input Frequency	60 Hz
Power (Nom)	7.2 W
Lamp Current (Nom)	82 mA
Wattage Equivalent	65 W


Starting Time (Nom)	0.5 s
Warm Up Time to 60% Light (Nom)	0.5 s
Power Factor (Nom)	0.7
Voltage (Nom)	120 V
Temperature	
T-Case Maximum (Nom)	70 °C
Controls and Dimming	
Dimmable	Yes
Mechanical and Housing	
Bulb Finish	Frosted
Bulb Shape	BR30 (BR30)
Approval and Application	
Energy Efficiency Label (EEL)	Not applicable
Energy Consumption kWh/1000 h	- kWh
Product Data	
Order product name	7.2BR30/PER/927/P/E26/DIM 6/1FB T20
EAN/UPC - Product	046677553890
Order code	929002092304

LED BR30

Numerator - Quantity Per Pack	1
Numerator - Packs per outer box	6
Material Nr. (12NC)	929002092304

Net Weight (Piece)	0.095 kg
--------------------	----------


Dimensional drawing




BR30 120V 7.2-65W 650lm 2700K E26 D

Product	D	C
7.2BR30/PER/927/P/E26/DIM 6/1FB T20	95 mm	132 mm

Photometric data




General Illuminance Lighting
1 x 7.2BR30/PER/927/P/E26/DIM 6/1FB T20
Page 11 of 11



LEDbulb 65W E26 BR30 927 Frosted


LEDbulb 65W E26 BR30 927 Frosted

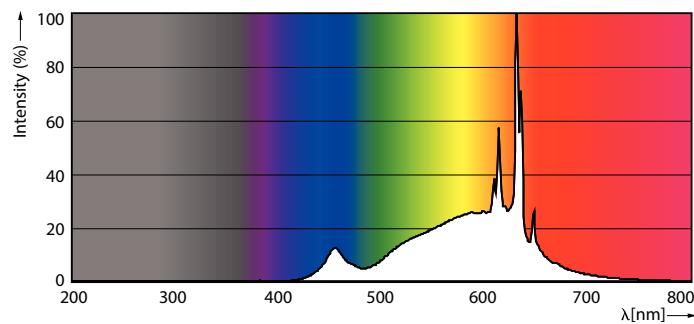

LEDbulb 65W E26 BR30 927 Frosted

LED BR30

Lifetime

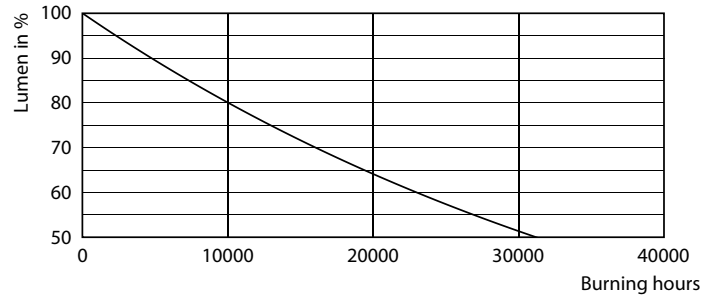

15K LED

15K LMP

