


# Multi-Flange Rod Hanger For Purlins, Beams & Joists

## Features

- C or Z Purlins or horizontal beam flanges with up to 1/4" (7 mm) flange thickness
- Slotted, Hex, Robertson, Phillips combo head bolt
- Hardened cup point setscrew for secure grip
- Fast installation of threaded components (1/4", 3/8", M6, M8 and M10). No nuts required
- Swivel feature option
- Electro-zinc plated finish for good corrosion protection



UL® listed for fire protection on Z & C purlin applications. No more drilling of purlins!

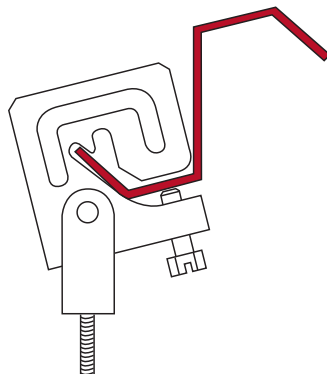

Swivel allows  
straight  
drops from  
pitched roofs



UL Listed - For Electrical Applications (All Flanges)

## EASY INSTALLATION:



1. Position hanger on C or Z purlin or on horizontal flange. (Z purlin shown)




2. Tighten screw until secure.



3. Attach threaded rod.



# Multi-Flange Rod Hanger For Purlins, Beams & Joists

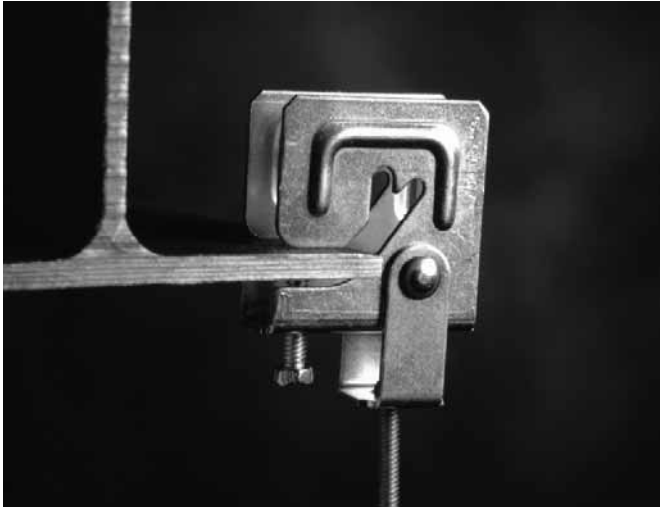


**PH/SW**

Multi-flange hanger also works on horizontal beam flanges. (Not UL<sup>®</sup> Listed for fire protection on I-beams.)

**PH/SW-FP**

Multi-flange hanger for fire protection applications on purlins requires jam nut as shown.


UPC # 782856-	PART NUMBER	FIG. NO.	DESCRIPTION	THREAD	
34773	PH4	1	Rod Hanger	1/4-20	25
34772	PH6	1	Rod Hanger	3/8-16	25
43832	PH6FP	1	Rod Hanger*	3/8-16	25
34764	PHSW4	2	Rod Hanger with Swivel	1/4-20	25
34765	PHSW6	2	Rod Hanger with Swivel	3/8-16	25
41605	PHSW6FP	2	Rod Hanger with Swivel*	3/8-16	25

\*Includes jam nuts for fire protection applications up to 3" sprinkler piping on C & Z purlins.  
 Note: Loads up to 200 lbs. (0.90 kN) on C or Z purlins or 160 lbs. (0.71 kN) on horizontal beams.  
 Metric sizes available, contact ERICO<sup>®</sup>.

**INSTALLATION TOOL OPTIONS**



Distributed By:

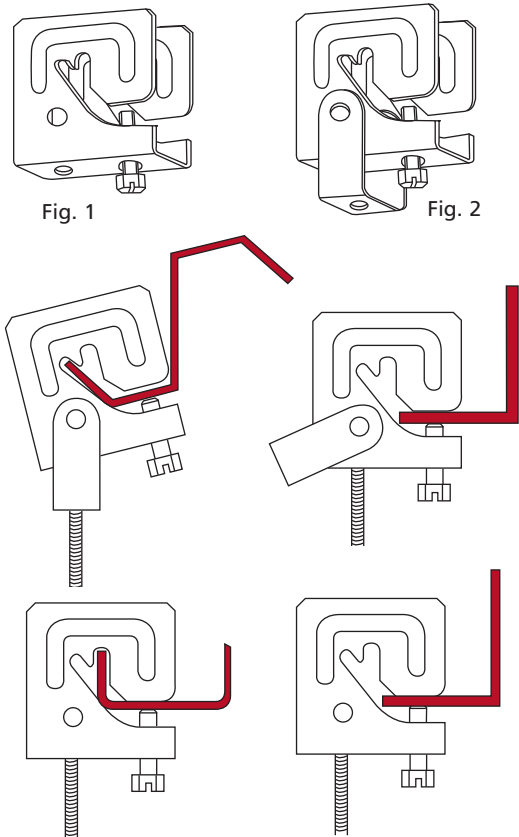

**WARNING**  
 ERICO products shall be installed and used only as indicated in ERICO's product instruction sheets and training materials. Instruction sheets are available at [www.erico.com](http://www.erico.com) and from your ERICO customer service representative. Improper installation, misuse, misapplication or other failure to completely follow ERICO's instructions and warnings may cause product malfunction, property damage, serious bodily injury and death.

UL is a registered trademark of Underwriters Laboratories, Inc.  
 Copyright ©2008 ERICO International Corporation. All rights reserved.  
 CADDY, CADWELD, CRITEC, ERICO, ERIFLEX, ERITECH, and LENTON are registered trademarks of ERICO International Corporation.