
DESIGNER™

coarse texture



\$\$\$\$\$

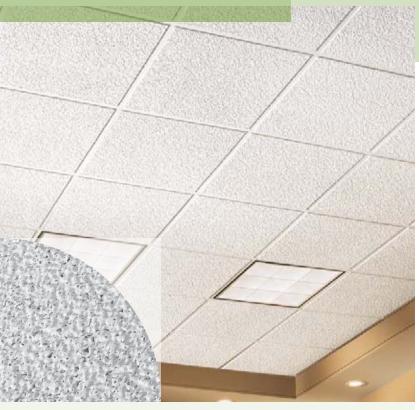

Key Selection Attributes

- · Classic look on standard grid
- · Acoustical and economical

Typical Applications

- · Offices/conference rooms
- · Waiting areas
- Retail/department stores



White (WH)

Designer Angled Tegular with Prelude® 15/16" Exposed Tee grid

Visual Selection

Performance Selection Dots represent highest level of performance.

	(U) UL Classified Acoustics										Recycle Program
Edge Profile	Item No.	Dimensions		NRC	CAC	Fire Rating	Light Reflect	Sag Resist	Anti- Microbial	Durable	
DESIGNER Square Lay-	in										
15/16" Square Lay-in	735	2' x 2' x 5/8"		0.55	30	Class A	0.81	S	-	S	Yes
	734	2' x 4' x 5/8"		0.55	30	Class A	0.81	S	_	S	•
DESIGNER Tegular											
15/16" Angled Tegular	737	2' x 2' x 5/8"		0.55	33	Class A	0.81	S	_	S	•
	S = Standard										
Suspension Systems											
15/16" Standard: Prelude®											

Physical Data

Material Wet-formed mineral fiber

Surface Finish Factory-applied latex paint

Fire Performance
ASTM E84 and CAN/ULC S102 surface burning characteristics. Flame Spread Index 25 or less. Smoke Developed Index 50 or less. (UL labeled)

ASTM E1264 Classification Type III, Form 2, Pattern F, Fire Class A

VOC/Formaldehyde Emissions Meets CA Dept. of Health Services Standard Practice for the testing of VOC Emissions.

Insulation Value R Factor – 1.5 (BTU units) R Factor – 0.26 (Watts units)

Backloading RecommendationContact TechLine for specific information

Warranty Information
1-year limited warranty. Details: armstrong.com/ceilings

Weight; Square Feet/Carton 734 - 0.80 lbs/SF; 80 SF/ctn 735, 737 - 0.80 lbs/SF; 64 SF/ctn



