

GTO®/ACCESS SYSTEMS

COMMERCIAL/RESIDENTIAL

Technology • Innovation • Quality
Since 1987




DRIVEWAY VEHICLE SENSOR (FM139)

Automatically activates gate operator
“Hands-Free” when a vehicle exits the
property. Easy to install.

Driveway Wand Sensor direct burial wire lengths:

- (FM139) 50 ft. (15.3 m)
- (FM140) 100 ft. (30.5 m)
- (FM141) 150 ft. (45.7 m)
- (FM141-250) 250 ft. (76.2 m)

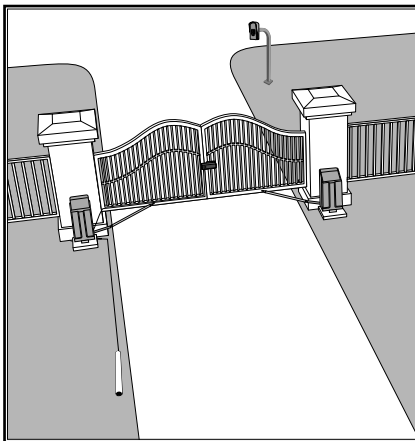

STANDARD FEATURES

- Electromagnetic sensor detects vehicles-in-motion. Similar in operation to a loop system without the need to cut the driveway or asphalt.
- Compatible with all automatic gate operators, or other systems requiring a dry contact input device.
- Wide input voltage range (8-32 V AC or 8-26 V DC).
- Ideal for solar application, 1.5 mA current consumption.
- Relay latch time of 2 seconds. May not be used as a safety device.
- Adjustable sensitivity from 3 to 12 ft. radius (.9m –3.7 m).
- Designed to minimize line noise of 50Hz or 60Hz; improves detection capability near power lines and avoids crosstalk frequency issues.
- Dimensions: 1.75" (4.5 cm) diameter x 16.75" (42.5 cm) long.

AVAILABLE FROM:

1-800-543-GATE (4283) • WWW.GTOACCESS.COM

GTO®, GTO/PRO®, Bulldog®, GTO Access Systems™, are trademarks of GTO, Inc. and are the exclusive property of GTO, Inc. ("GTO"). All rights are reserved by GTO, and these marks may not be used in any form without the prior written permission of GTO. © 2009