

# CTD Series Current Transducer Devices

## Description

The Current Transducer Device (CTD) Series of analog output current transducers are nonintrusive devices designed to monitor current flowing through a cable or wire. These units are a cost-effective solution for monitoring load or proof of operation. The current transducers are ideal for monitoring current loads on pumps, driving fans, and blowers, and sensing the status of heating coils and lighting. CTD devices used for load trending over time are effective sensors for predictive maintenance programs.

These units are available with standard 4 to 20 mA current loop, 0 to 5 VDC, and 0 to 10 VDC analog output. The voltage output models derive excitation by magnetic induction from the current-carrying conductor (wire or cable), making these units completely self-powered. The current loop output model requires a 24 VDC power supply.

Optional command relays (CR-01200-0 and CR-02400-0) provide externally controlled auxiliary contacts when used with the current transducers. The relays offer a cost-effective solution for switching loads that require higher power levels than the rating of the current switch contacts, or the need to mount an external relay elsewhere in the control enclosure.

Refer to the *CTD Series Current Transducer Devices Product Bulletin (LIT-12011714)* for important product application information.

## Features


- clamped/split core design — reduces installation time and associated costs
- slide switch, selectable amperage ranges — provides a wide array of amperage ranges to match the application
- multiple outputs: 4 to 20 mA, 0 to 5 VDC, or 0 to 10 VDC — provide the appropriate output for the specific application
- snap-on power relay — provides an easy way to add an external relay to the current sensor
- relay (optional) LED indication Off/On status — allows you to easily check the relay's on/off status



CTD Current Transducers

## Repair Information

If the CTD transducers fail to operate within its specifications, replace the unit. For a replacement enclosure, contact the nearest Johnson Controls® representative.

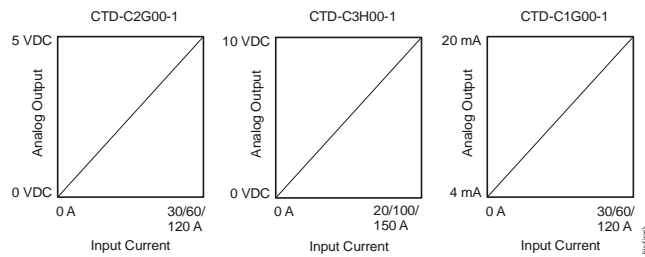

Linear Outputs

## Ordering Information

### Product Ordering

Product Code Number	Core Type	Multi Range	Output Signal	LED Display	Relay
CTD-C1G00-1	Split/Clamped	30/60/120 A	4 to 20 mA <sup>1</sup>	With Optional Relay <sup>2</sup>	Snap-On Accessory
CTD-C2G00-1	Split/Clamped	30/60/120 A	0 to 5 VDC	With Optional Relay <sup>2</sup>	Snap-On Accessory
CTD-C3H00-1	Split/Clamped	20/100/150 A	0 to 10 VDC	With Optional Relay <sup>2</sup>	Snap-On Accessory

1. Requires a 24 VDC/25 mA external power supply.
2. The relay is an accessory.

### Accessories


Product Code Number	Product Code Description
CR-01200-0 <sup>1</sup>	12 VAC/VDC Single-Pole, Single-Throw (SPST), Normally Open (N.O.) Relay
CR-02400-0 <sup>1</sup>	24 VAC/VDC SPST, N.O. Relay

1. Refer to the *Command Relay Installation Instructions (Part No. 24-10345-50)* for more information regarding the command relays.

## Current Transducer Devices (Continued)

### Technical Specifications

#### CTD Series Current Transducer Devices

Product Code	CTD-C1G00-1	CTD-C2G00-1	CTD-C3H00-1
Current Range (Selectable)	30/60/120 A	30/60/120 A	20/100/150 A
Maximum Continuous Operating Current	30/60/120 A	30/60/120 A	20/100/150 A
Output	4 to 20 mA	0 to 5 VDC	0 to 10 VDC
Accuracy	±2.0% Full Scale from 10% to 100% of Selected Range		
Relay with LED Indicator	Available Accessory		
Response Time	2 Seconds to 100% of Selected Range		
Sensor Supply Voltage	24 VDC (18 to 30 VDC)	Self-Powered	Self-Powered
Wire Size	12 to 22 AWG (2.1 to 0.6 mm) Diameter Recommended		
Isolation Voltage	600 VAC rms		
Temperature Range	5 to 140°F (-15 to 60°C)		
Frequency Range	50/60 Hz		
Humidity Range	0 to 95% RH, Noncondensing		
Screw Torque	4 lb-in (0.5 N-m)		
Dimensions	2-23/32 x 2-9/16 x 1-1/16 in. (69 x 65 x 27 mm)		
Aperture (Sensing Hole) Size	23/32 in. x 13/16 in. (18 x 20 mm Diameter)		
	United States	UL Listed, File E310692, CCN NRNT, Under UL 508, Industrial Control Equipment	
	Canada	UL Listed, File E310692, CCN NRNT7, Under CAN/CSA C22.2 No. 14-05 Industrial Control Equipment	
	Europe	CE Mark – Johnson Controls, Inc., declares that this product is in compliance with the essential requirements and other relevant provisions of the EMC Directive 2004/108/EC and the Low Voltage Directive 2006/95/EC.	
Shipping Weight	0.35 lb (0.16 kg)		