

2K EPOXY PRIMER Aerosol















Two-component (2K) epoxy. One can convenience.

- Easy, no mess activation
- Enhances the performance of any topcoat
- Superior corrosion and chemical protection, impact and scratch resistance



2K EPOXY PRIMER Aerosol

For moderate to severe industrial environments

Less Prep Time • Direct-To-Metal (DTM), sound rust and previously coated surfaces

Less Application Time • No ancillary product or equipment needed

Less Downtime • Dries to handle in 2 hours (versus 6-12 hours for typical 2K epoxies)


Greater Lifetime Value • Long-lasting chemical and corrosion resistance

Typical applications

Hard to reach areas exposed to corrosion and chemicals: Welds • Seams • Bolts • Edges • Machinery • Equipment • Pipelines



Joints and seams

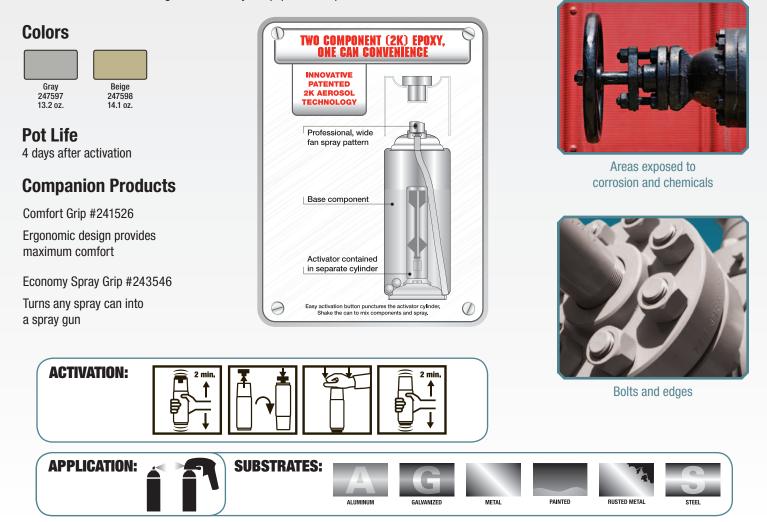



Contact your Rust-Oleum representative for more information Phone: (800) 553-8444 Fax: (800) 782-3369 email: customerservice@rustoleum.com

www.rustoleum.com/industrial