

Series	30	Sleeve Material Steel
Shut Off	Double	Coupler Body Size 3/8"
Seal Type	Captive Valve	Coupler Flow Rate 6.0 gpm
Valve Design	Poppet	Locking Mechanism Screw Together
Seal Material	Buna	Coupler Thread Size 3/8"-18
Max. Pressure	10,000 psi	Coupler Body Material Steel





COMPONENT

Hydraulic Quick Couplers

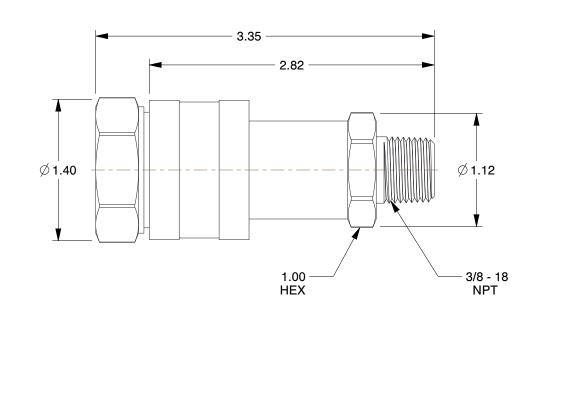

1. ITEM: Hydraulic Coupler Set

- 2. COUPLER INTERCHANGE TYPE: S30
- 3. PARKER INTERCHANGE: 3010-3 & 3050-3
- 4. OPERATING TEMP. RANGE: -40° to 250°F
- 5. COUPLER FINISH: Trivalent Chromium Zinc
- 6. QUICK COUPLER TYPE: Hydraulic Coupler Set
- 7. COUPLER CONNECTION TYPE: FNPT and MNPT
- 8. FOR USE WITH: Pumps and Cylinders at 10,000 psi
- 9. HANSEN INTERCHANGE: WA 56527 00 & WA 56524 00

			,	
<b>GRAINGER</b>	This file and any associated information and specifications are provided for reference and evaluation purposes only,	This drawing is the property of GRAINGER. It contains confident		UNIT
	for any purpose, of the file, information or specifications.	proprietary information that is GRAINGER property. Do not discl	2F769	INCH
100 Grainger Parkway, Lake Forest, Illinois 60045-5201 1-(800) GRAINGER, 1-(800) 472-4643, (847) 535-1000		to or duplicate for others excep as authorized by GRAINGER.		SHEET
www.grainger.com	You are solely responsible for the use of the file, information or specifications.	<b>SCALE</b> 1.05	Coupler Set,3/8-18,3/8 In. Body,Steel	1 of 1