



| Series | Parker ST Series |
|---------------------|------------------|
| Connection Type | MNPT |
| Coupler Flow Rate | 50.0 gpm |
| Coupler Body Size | 1" |
| Coupler Thread Size | 1"-11-1/2 |

| | Max. Pressure | 1200 psi |
|--|-----------------------|------------------------|
| | Quick Coupler Type | Hydraulic Coupler Body |
| | Locking Mechanism | Ball |
| | Coupler Body Material | Brass |
| | Operating Temp. Range | -40° to 250°F |
| | | |



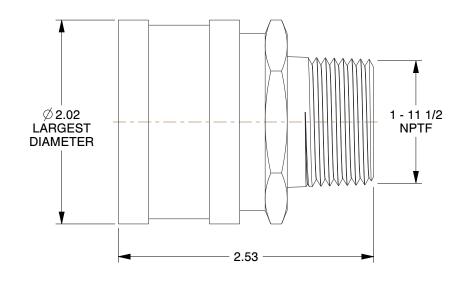

NOTES:

SEAL MATERIAL: Buna
 COUPLER FINISH: Plain
 SLEEVE MATERIAL: Brass

4. ITEM: Hydraulic Coupler Body

5. FOR USE WITH: Parker ST Series6. PARKER INTERCHANGE: BST-8M

7. BEARING MATERIAL: Stainless Steel

8. COUPLER INTERCHANGE TYPE: ST



100 Grainger Parkway, Lake Forest, Illinois 60045-5201 1-(800) GRAINGER, 1-(800) 472-4643, (847) 535-1000 www.grainger.com This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. Grainger makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

This drawing is the property of GRAINGER. It contains confidential, proprietary information that is GRAINGER property. Do not disclose to or duplicate for others except as authorized by GRAINGER.

1.05

SCALE

 COMPONENT
 Hydraulic Quick Couplers

 31A963
 INCH

 SHEET
 1 of 1