


NOTES:

2. Rod End Type : Female Studded

5. Bearing : 440C SS Spherical Ball

8. Max. Angular Misalignment : 30° 9. Static Radial Load : 23,699 N

3. Thread Type : Left Hand

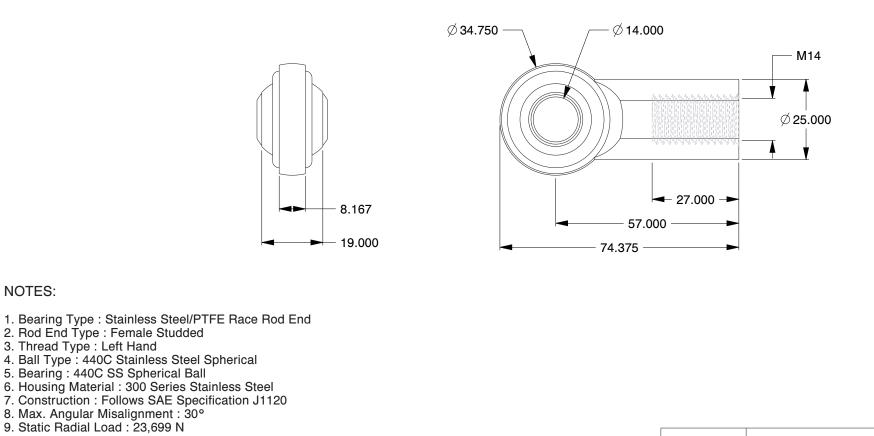

COMPONENT SPHERICAL ROD END This drawing is the property of This file and any associated information and specifications UNIT GRAINGER GRAINGER. It contains confidential, are provided for reference and evaluation purposes only, 39N519 and is subject to change without notice. Grainger makes proprietary information that is MM GRAINGER property. Do not disclose no representations, warranties or guarantees as to the 100 Grainger Parkway, Lake Forest, Illinois 60045-5201 appropriateness, accuracy, completeness, or suitability to or duplicate for others except SHEET Female Stud, SS/PTFE Race Rod 1-(800) GRAINGER, 1-(800) 472-4643, (847) 535-1000 for any purpose, of the file, information or specifications. as authorized by GRAINGER. You are solely responsible for the use of the file. End,LH,33mm www.grainger.com SCALE 2.00 1 of 1 information or specifications.