



Force Rating	900 lb.	Max. Pressure	80 psi
Bin Weight Capacity	9000 lb.	Max. Temp.	350 °F
Speed @ 80 psi	4500 VPM	Speed @ 60 psi	4000 VPM
dB @ 80 psi	77	dB @ 60 psi	-
CFM @ 80 psi	13	CFM @ 60 psi	12

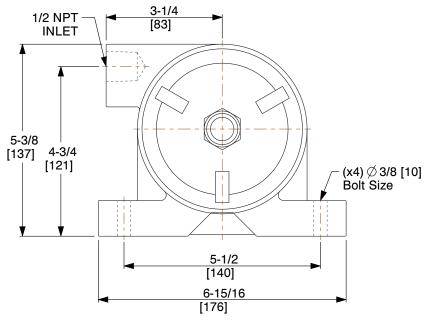

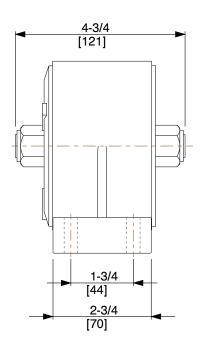

NOTES:

MOUNTING: Foot
 MUFFLER: Included
 DUTY: Continuous

4. VIBRATOR TYPE: Turbine

5. HOUSING MATERIAL: Cast Iron6. MOUNTING PLATE: Sold Separately

7. STANDARDS: CE Certified, ATEX Certified

	74 7 7		
GK	AII	NG	137

100 Grainger Parkway, Lake Forest, Illinois 60045-5201 1-(800) GRAINGER, 1-(800) 472-4643, (847) 535-1000 www.grainger.com This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. Grainger makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications.

You are solely responsible for the use of the file, information or specifications.

This drawing is the property of GRAINGER. It contains confidential, proprietary information that is GRAINGER property. Do not disclose to or duplicate for others except as authorized by GRAINGER.

SCALE

0.372

COMPONENT

Pneumatic Vibrator

6L751

PNEUMATIC VIBRATOR, 900 LB, 4000 VPM, 80 PSI

INCH [MM]

UNIT

1 of 1