

Fuse Holders for Low-Peak® CUBEFuse® Finger-Safe, 1-100A, 600Vac/300Vdc



Catalog Symbols: TCFH30N (1-30A)

TCFH60N (1-60A)

TCFH100N (1-100A)

Construction: Finger-safe

Mounting: DIN Rail or panel mount

Ampacities: TCFH30N - holds any 1-30A CUBEFuse

TCFH60N - holds any 1-60A CUBEFuse TCFH100N - holds any 1-100A CUBEFuse

Voltage Rating: 600Vac/300Vdc

Withstand Rating: 300kA RMS Sym. (UL)

200kA RMS Sym. (CSA) 100kA DC (UL & CSA)

Agency Information:

• UL Listed Special Purpose Fuse: Guide JFHR, File E56412

• CSA Certified Fuse: Class 1422- 02, File 53787

• CE compliance for the European Union low voltage directive

Operating and Storage Temperature Range: 14 to 149°F(-10 to 65°C) Material Specifications:

Holder case: Glass filled PBT
Interface clips: Copper alloy
Interface clip plating: Tin

• Terminals: Steel

• DIN Rail spring: Stainless steel

Features and Product Benefits

- Holder for the world's first finger-safe power fuse system.
- Holder and CUBEFuse together deliver Class J fuse performance with dualelement, time-delay and current limitating operation. See Data Sheet 9000 for indicating and non-indicating CUBEFuse performance characteristics.
- Smallest fuse and holder footprint of any class fuse installation including Class J, CC, T and RK.
- DIN Rail or panel mount for easy installation.
- Holders dovetail together to easily achieve the required number of poles.
- All holders (TCFH30N, TCFH60N and TCFH100N) dovetail together to permit mixing ampacities.
- All holders accept equal and lower amp rated TCF_ indicating and TCF_RN non-indicating CUBEFuse - no need for a fuse reducer.
- · Dual wire rated terminals for wiring ease.
- High 300kA withstand rating stands up to high fault currents.

Conductors/Wire Range - 75°C Cu Wire Only

Holder/ Ampacity	No. of Poles*	Single Wire	Dual Wire
TCFH30N	1	18 to 8 AWG	18 to 10 AWG
TCFH60N	1	18 to 4 AWG	18 to 6 AWG
TCFH100N	1	18 to 1 AWG	6 AWG

Holders dovetail together to achieve the desired number of poles for the application.

Data Sheet 9007

Carton Quantity and Weight

Part	Carton	Weight Per Carton		
Number	Qty.	lbs	kg	
TCFH30N	12	2.42	1.10	
TCFH60N	12	2.57	1.17	
TCFH100N	6	1.38	0.63	


Terminal Torque Ratings by Conductor and Holder Size (75°C Cu only)


TCFH30N		TCFH60N		TCFH100N	
Single	Dual	Single	Dual	Single Dual	
10-8 AWG 25lb-in	18-10 AWG 25lb-in	18-10 AWG 20lb-in	18-10 AWG 20lb-in	18-10 AWG 25lb-in	6 AWG 45lb-in
18-12 AWG 20lb-in		8-4 AWG 35lb-in	8-6 AWG 35lb-in	8-1 AWG 40lb-in	

0509 BU-SB09403 Page 1 of 2



TCFH Dimensions - in (mm)

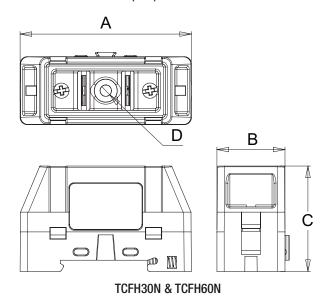

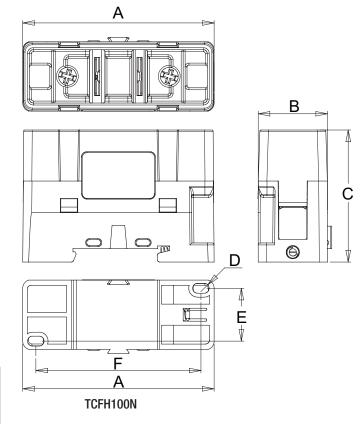

Holder	Α	В	C	D	E	F
TCFH30N	2.30	0.76	1.357	0.15	-	-
	(58.50)	(19.37)	(34.24)	(3.76)	-	-
TCFH60N	2.60	1.03	1.60	0.17	-	-
	(66.12)	(26.23)	(40.64)	(4.34)	-	-
TCFH100N	2.91	1.05	2.01	0.15	0.80	2.51
	(73.81)	(26.74)	(50.93)	(3.81)	(20.39)	(63.65)

CUBEFuse Availability and Applications

The indicating Low-Peak® CUBEFuse® (TCF_) and non-indicating Low-Peak CUBEfuse (TCF RN) are available in amp ratings from 1-100A. See Data Sheet 9000. The CUBEFuse is also used in these other Cooper Bussmann® circuit protection solutions.



70-100A Case Size

TCF_ Indicating and TCF_RN non-indicating CUBEFuse. Data Sheet 9000



1-30A Case Size

35-60A Case Size



CCP CF 1-. 2- & 3-Pole switched disconnects Data Sheet 1157



CCPB 1-, 2- & 3-Pole disconnects for the Quik-Spec[™] Coordination Panelboard, Data Sheet 1160

Data Sheet 9007



CF Quik-Spec™ Safety Switch disconnect (optional window). Data Sheet 1156

The only controlled copy of this Data Sheet is the electronic read-only version located on the Cooper Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Cooper Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Cooper Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.

© 2009 Cooper Bussmann St. Louis, MO 63178 www.cooperbussmann.com

0509 BU-SB09403

