


Dimensional Drawing



6K406BG		REV.
		-

VAR	MODEL	CUST. PT. NO.	A	B	C	D	HP	VOLTS	SF	AMPS	HZ	RPM	CONN VOLTS	PROT.	DESCRIPTION / REMARKS
001	S55JXRLH-8485	6K406BG	10.013	-----	-----	-----	1/4	115	1.0	4.5	60	1725	---	AUTO	48YZ, TEAO, BALL BEARING

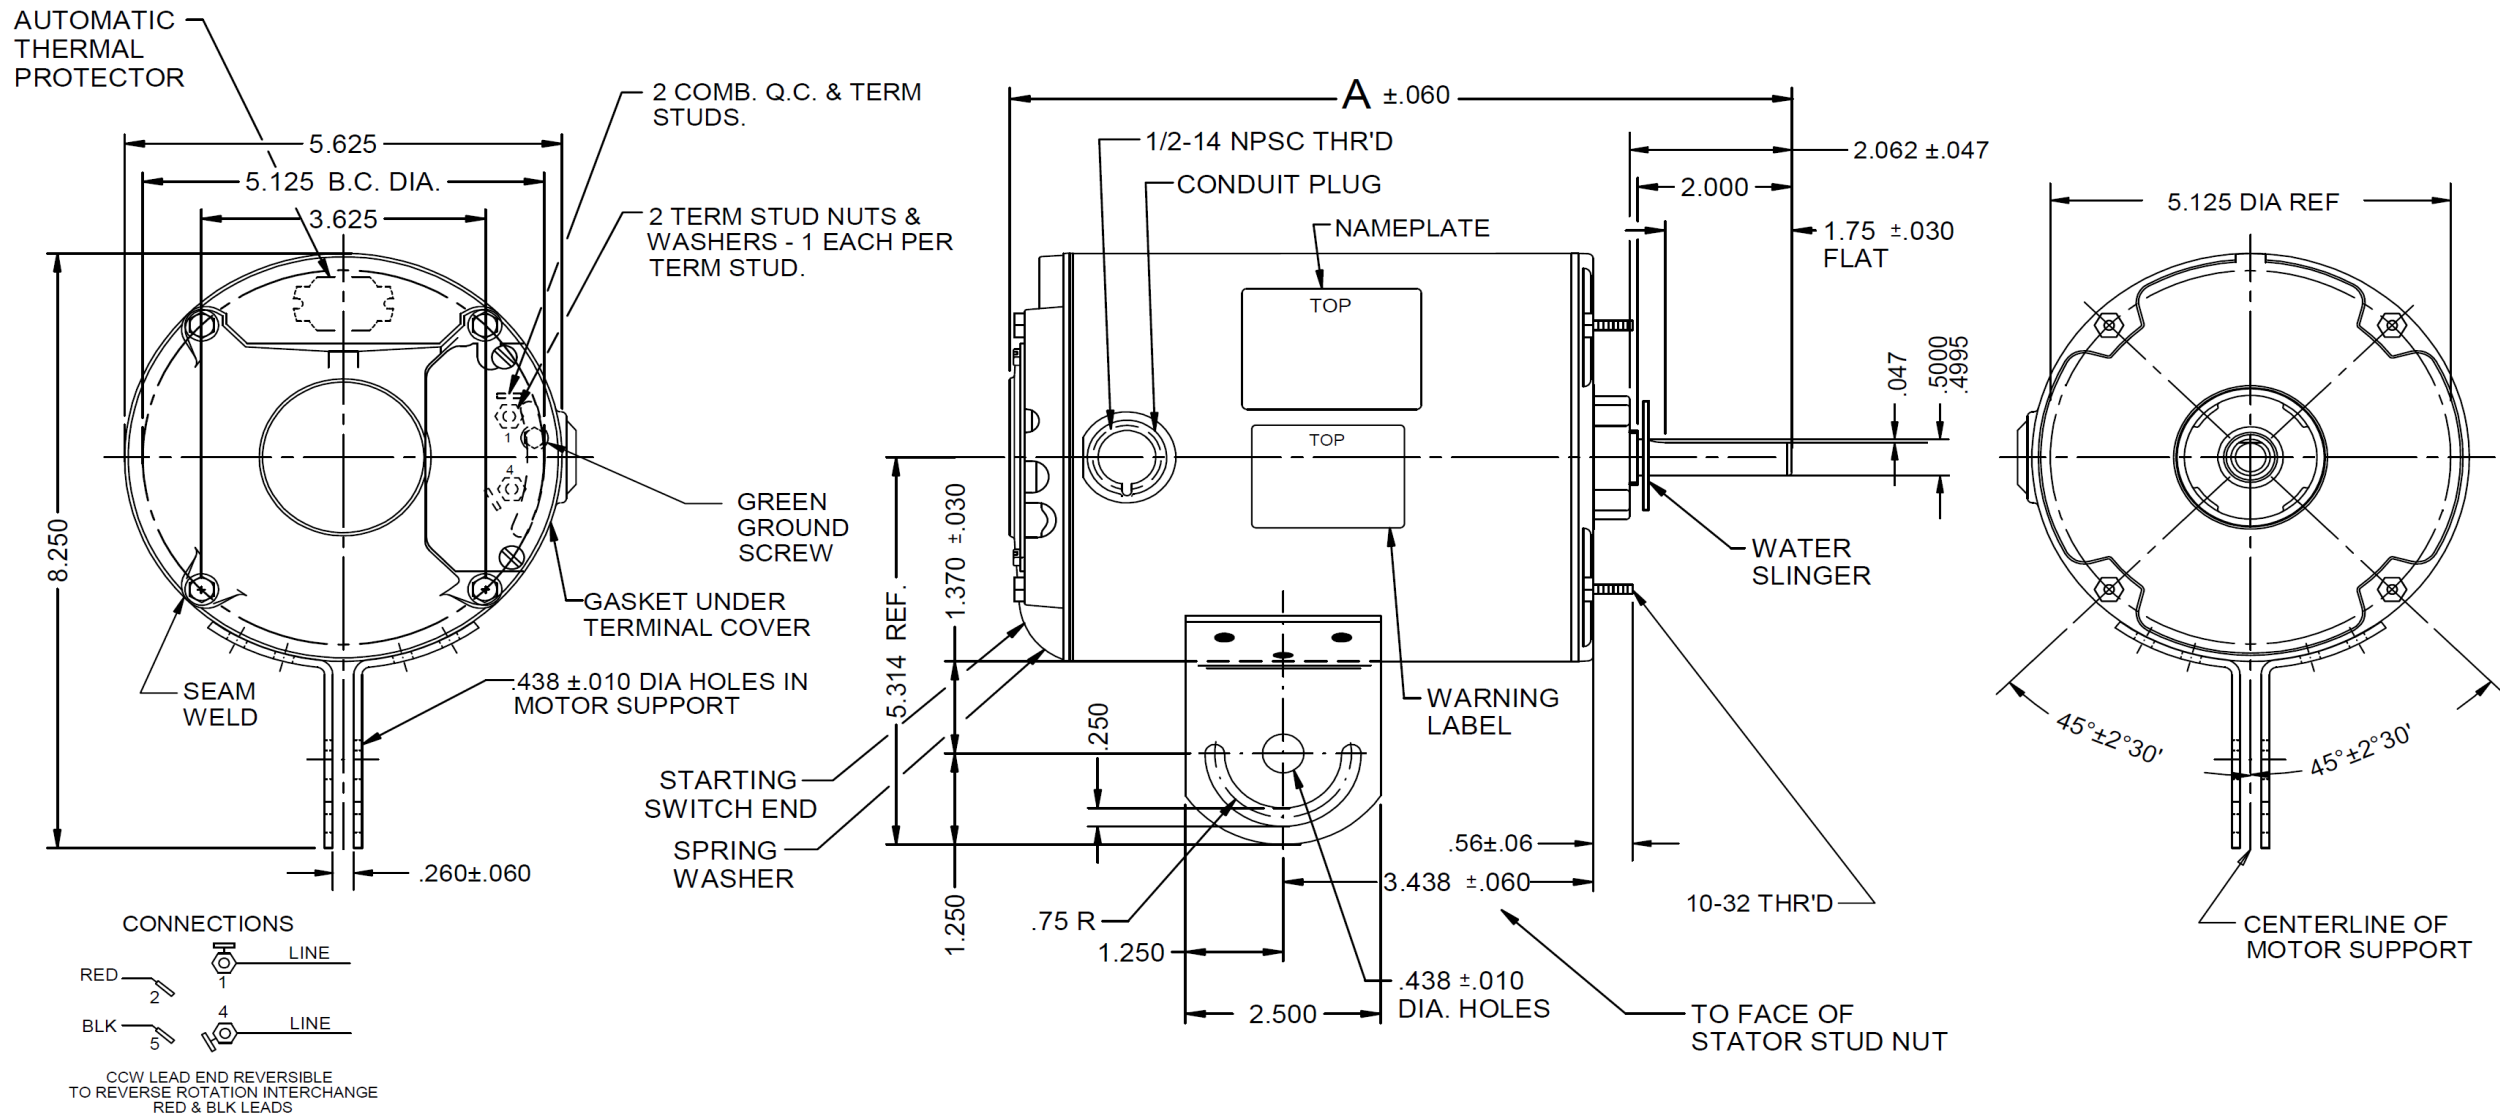

DRAWING NO.	PAGE 1 of 1	REV.
	6K406BG	-

Dayton Electric Mfg. Co. Lake Forest, IL 60045 USA

6K406BG

REV.

-

SPLIT-PHASE & CAPACITOR START MOTOR PERFORMANCE

HP:	1/4							
Poles:	4							
Ambient (°C)	40							
Altitude (FASL):								
No. of Speeds:	1							
Volts:	115	115						
HZ:	60	60						
Service Factor:	1							
Efficiency:	@ Rated Load	57.8						
Power Factor:	@ Rated Load	64.6						
Amps:	@ No Load							
	@ Rated Load	4.4						
	@ Service Factor	4.4						
	@ Locked Rotor	27.6						
RPM:	@ Rated Load	1747						
Torques: Oz.Ft. / Lb.In. (Circle One)	Breakdown	31.8						
	Locked Rotor	16.8						
	Pull-Up	15.7						
	Rated Load	12.2						
	Service Factor	12.2						
Watts:	@ Rated Load	326						
KVA Code:	P	P						
Temperature Rise:	@ Rated Load	-						
	@ Service Factor	-						
Thermal Protector:	Trip Temp (°C)	134.2						
Winding Material:	Start (Auxiliary)	Al						
	Run (Main)	Al						
Capacitor(s):	Start Micro-Farads Rating	N/A						
	Start Voltage Rating							
	No. of Start Capacitors	0						
	Run Micro-Farads Rating	N/A						
	Run Voltage Rating							
	No. of Run Capacitors	0						

LOW SPEED PERFORMANCE DATA:

HP:								
Poles:								
Volts:								
HZ:								
Efficiency:	@ Rated Load							
Power Factor:	@ Rated Load							
Amps:	@ No Load							
	@ Rated Load							
	@ Service Factor							
	@ Locked Rotor							
Torques: Oz.Ft. / Lb.In. (Circle One)	Breakdown							
	Locked Rotor							
	Pull-Up							
	Rated Load							
	Service Factor							
Watts:	@ Rated Load							
Temperature Rise:	@ Rated Load							
	@ Service Factor							

DRAWING NO. PAGE 1 of 1

REV.

6K406BG

-

Performance Data



6K406BG	REV. -
----------------	-----------

Dayton Manufacturing Company

Motor Description

Model: S055RLH8485 6K406BG
 Motor ID: 1
 Poles: 4
 Volts: 115
 Frequency: 60
 HP: 1/4
 Speed: 1725
 Phase: 1
 Protector: MEJ26CY

Test Conditions

Test Type: Start
 Test Number: 2
 Poles: 4
 Volts: 115
 Hz: 60
 Rotation: CW
 Special Cond:
 Speed Conn:
 TestBoard: Amps Performance Fixture #4
 Run Cap: 0
 Start Cap: 0µfd
 Environment: 20.4 Deg C 53 % RH 996 hPa
 Tested: 9/28/2015 8:35:13 AM
 Tested By: Sharp, Gerald
 Gear Ratio: 1:1
 Bearing Friction: -0.65 Oz-Ft
 Windage Torque: -2.08 Oz-Ft

Comments: cwle


Special Points	Vline (V)	Iline (A)	Imain (A)	Iaux (A)	Watts	RPM	Tq (Oz-ft)	HP	Eff (%)	PF (%)
	115.0	27.65	17.810	10.394	2618	28	16.81	0.006	0.2	82.3
	115.0	27.62	17.811	10.360	2613	22	16.37	0.004	0.1	82.3
26.72 RPM	115.0	27.61	17.810	10.353	2613	27	16.41	0.005	0.1	82.3
	115.0	27.54	17.833	10.214	2603	122	16.44	0.024	0.7	82.2
PUT OZ-FT	115.0	27.50	17.845	10.137	2604	179	15.70	0.033	1.0	82.3
	115.0	27.44	17.834	10.041	2599	260	16.79	0.052	1.5	82.3
	115.0	27.27	17.782	9.847	2587	397	18.77	0.089	2.6	82.5
	115.0	27.05	17.670	9.666	2573	524	20.38	0.127	3.7	82.7
	115.0	26.82	17.539	9.493	2561	638	22.06	0.167	4.9	83.0
	115.0	26.55	17.358	9.341	2541	742	23.84	0.210	6.2	83.2
	115.0	26.25	17.164	9.178	2524	835	25.75	0.256	7.6	83.6
	115.0	25.90	16.929	9.005	2499	925	27.58	0.304	9.1	83.9
	115.0	25.53	16.681	8.844	2473	1004	29.10	0.348	10.5	84.2
	115.0	25.12	16.400	8.684	2441	1079	30.56	0.393	12.0	84.5
	115.0	24.69	16.099	8.532	2409	1148	31.77	0.434	13.4	84.8
	115.0	24.24	15.777	8.398	2371	1211	32.76	0.472	14.9	85.1
	115.0	23.76	15.423	8.281	2331	1270	33.47	0.506	16.2	85.3
	115.0	23.20	15.042	8.190	2283	1324	33.87	0.534	17.4	85.6
BDT OZ-FT	115.0	22.81	14.743	8.136	2248	1363	33.87	0.549	18.2	85.7
	115.0	22.70	14.656	8.124	2238	1373	33.84	0.553	18.4	85.7
	115.0	22.13	14.200	8.086	2188	1422	33.46	0.566	19.3	86.0
	115.0	21.65	13.814	8.078	2143	1460	32.89	0.572	19.9	86.1
	115.0	21.14	13.382	8.100	2096	1496	31.79	0.566	20.2	86.2
	115.0	20.62	12.942	8.144	2044	1531	30.38	0.554	20.2	86.2
28.52 OZ-FT	115.0	20.10	12.487	8.214	1993	1562	28.59	0.532	19.9	86.2
	115.0	19.59	12.039	8.307	1941	1592	26.53	0.503	19.3	86.2
	115.0	19.10	11.582	8.425	1890	1618	24.11	0.465	18.3	86.1
	115.0	18.61	11.107	8.562	1836	1643	21.37	0.418	17.0	85.8
	115.0	18.14	10.656	8.709	1785	1666	18.49	0.367	15.3	85.6
	115.0	17.66	10.199	8.865	1733	1687	15.33	0.308	13.3	85.3
	115.0	17.23	9.744	9.041	1680	1707	12.11	0.246	10.9	84.8
	115.0	16.79	9.268	9.239	1627	1726	8.43	0.173	7.9	84.3
	115.0	16.31	8.728	9.457	1567	1744	4.02	0.083	4.0	83.5
	115.0	15.96	8.348	9.621	1525	1760	0.67	0.014	0.7	83.1
	115.0	15.87	8.230	9.672	1512	1764	0.00	0.000	0.0	82.9

DRAWING NO.	PAGE 1 of 4	REV.
6K406BG		-

Performance Data



6K406BG REV. -

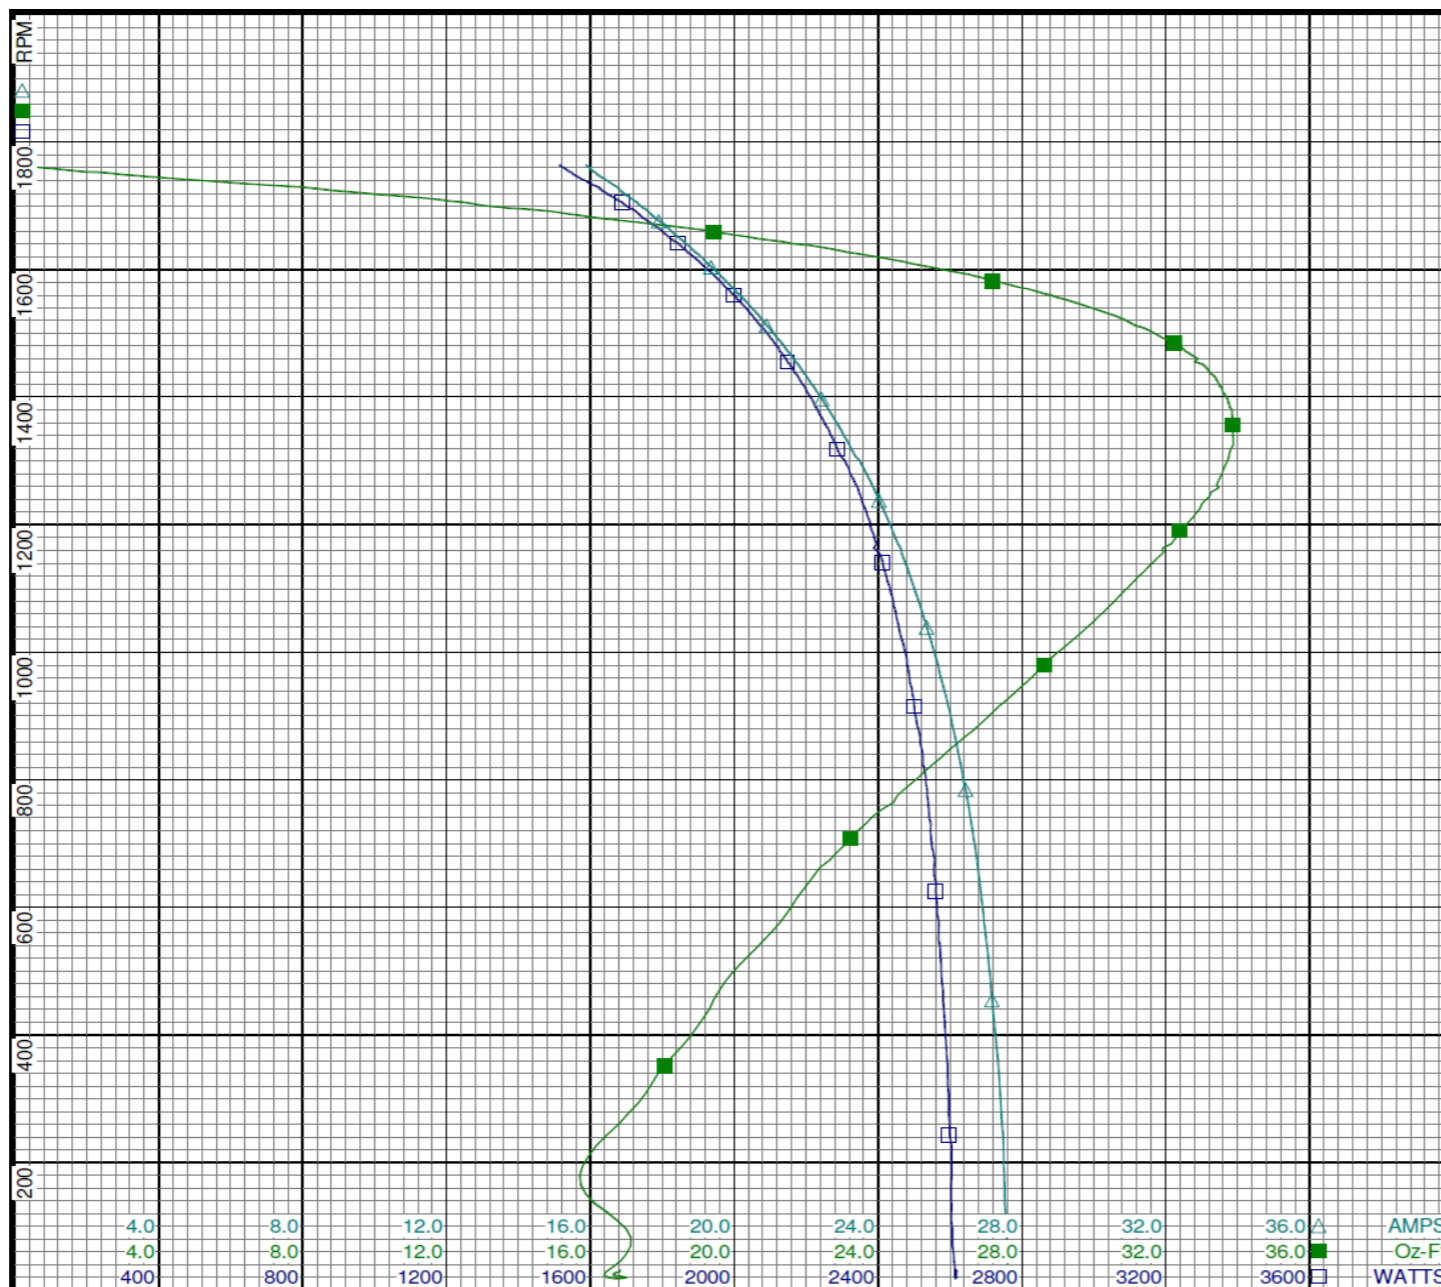

Dayton

Curve Descriptions:
 Motor(1) Test 2 Start 115V 60 Hz 4P CW

- SPEED vs WATTS
- SPEED vs TORQUE
- △ SPEED vs ILine

Motor Ratings:
 (1) S055RLH8485 6K406BG

DRAWING NO. PAGE 2 of 4 REV.
6K406BG -

Dayton Electric Mfg. Co. Lake Forest, IL 60045 USA

Performance Data



6K406BG		REV.	Dayton Manufacturing Company						
Motor Description				Test Conditions					
Model:	S055RLH8485	6K406BG	Test Type:	Run	Run Cap:	0			
Motor ID:	1		Test Number:	3	Start Cap:	0µfd			
Poles:	4		Poles:	4	Environment:	20.4 Deg C 53 % RH 996 hPa			
Volts:	115		Volts:	115	Tested:	9/28/2015 8:33:47 AM			
Frequency:	60		Hz:	60	Tested By:	Sharp, Gerald			
HP:	1/4		Rotation:	CW	Gear Ratio:	1:1			
Speed:	1725		Special Cond:		Bearing Friction:	-0.55 Oz-Ft			
Phase:	1		Speed Conn:		Windage Torque:	-1.97 Oz-Ft			
Protector:	MEJ26CY		TestBoard:	Amps Performance	Fixture #4				
Comments: cwle									
Special Points	Vline (V)	Iline (A)	Watts	RPM	Tq(Oz-ft)	HP	Eff (%)	PF (%)	
	115.0	3.543	105.3	1791	0.00	0.000	0.0	25.9	
	115.0	3.627	166.0	1779	3.44	0.073	32.7	39.8	
	115.0	3.914	245.6	1764	7.96	0.167	50.8	54.6	
	115.0	4.340	318.8	1748	11.80	0.246	57.5	63.9	
0.25 HP	115.0	4.370	323.3	1747	12.02	0.250	57.7	64.3	
12.17 OZ-FT	115.0	4.391	326.3	1747	12.17	0.253	57.8	64.6	
	115.0	4.902	401.0	1728	15.69	0.323	60.0	71.1	
	115.0	5.696	505.2	1707	20.08	0.408	60.3	77.1	
	115.0	6.557	603.3	1684	23.74	0.476	58.8	80.0	
	115.0	7.454	704.0	1656	26.95	0.531	56.3	82.1	
	115.0	8.389	799.5	1624	29.31	0.567	52.9	82.9	
	115.0	9.372	893.6	1588	30.90	0.584	48.8	82.9	
	115.0	10.332	981.4	1549	31.72	0.585	44.4	82.6	
BDT OZ-FT	115.0	11.015	1041.0	1516	31.78	0.573	41.1	82.2	
	115.0	11.228	1058.0	1504	31.74	0.568	40.1	81.9	
	115.0	12.055	1125.0	1457	31.07	0.539	35.7	81.1	
	115.0	12.789	1182.8	1408	30.11	0.505	31.8	80.4	
	115.0	13.440	1227.7	1358	28.58	0.462	28.1	79.4	
	115.0	13.995	1264.5	1307	26.97	0.420	24.8	78.6	
	115.0	14.527	1298.2	1251	25.13	0.374	21.5	77.7	
	115.0	14.983	1326.2	1195	23.32	0.332	18.7	77.0	
	115.0	15.397	1348.8	1136	21.35	0.289	16.0	76.2	
	115.0	15.770	1368.5	1074	19.29	0.247	13.4	75.5	
	115.0	16.098	1384.0	1009	17.46	0.210	11.3	74.8	
	115.0	16.393	1398.3	941	15.46	0.173	9.2	74.2	
	115.0	16.663	1410.4	868	13.46	0.139	7.4	73.6	
	115.0	16.903	1419.3	793	11.49	0.109	5.7	73.0	
	115.0	17.117	1428.2	714	9.49	0.081	4.2	72.6	
	115.0	17.306	1434.7	628	7.31	0.055	2.8	72.1	
	115.0	17.456	1439.5	539	5.40	0.035	1.8	71.7	
	115.0	17.570	1439.8	446	3.75	0.020	1.0	71.3	
	115.0	17.653	1443.4	350	2.36	0.010	0.5	71.1	
	115.0	17.697	1445.0	251	1.70	0.005	0.3	71.0	
	115.0	17.726	1444.3	139	0.16	0.000	0.0	70.9	
	115.0	17.753	1445.5	39	0.90	0.000	0.0	70.8	

DRAWING NO.	PAGE 3 of 4	REV.
6K406BG		-

Dayton Electric Mfg. Co. Lake Forest, IL 60045 USA

Performance Data



6K406BG REV. -



Dayton

Curve Descriptions:
 Motor(1) Test 3 Run 115V 60 Hz 4P CW

- SPEED vs WATTS
- SPEED vs TORQUE
- △ SPEED vs ILine

Motor Ratings:
 (1) S055RLH8485 6K406BG


DRAWING NO.	PAGE 4 of 4	REV.
6K406BG		-

Dayton Electric Mfg. Co. Lake Forest, IL 60045 USA

6K406BG

REV.
-

CONNECTIONS

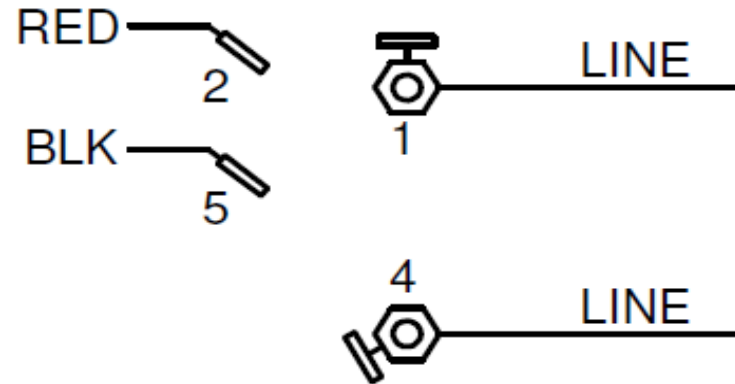

CCW LEAD END REVERSIBLE
TO REVERSE ROTATION
INTERCHANGE RED & BLK LEADS


DRAWING NO.	PAGE 1 of 1	REV.
6K406BG		-

Dayton[®]

PEDESTAL FAN MOTOR

HP: 1/4**VOLTS:** 115**AMPS:** 4.5**RPM:** 1725**DUTY:** CONT**SF:** 1.0**KVA CODE:** P**ENCL:** TEAO**THERMALLY PROTECTED:** AUTOMFG. NO. PROT. CODE: 04050 **MTR REF:** S55JXRLH-8485Part
No **6K406BG****PH:** 1**HZ:** 60**FR:** 48YZ**INS CL:** B**AMB:** 40 °C**SFA:** 4.5AVG. F.L.
EFF.**Disconnect Power Before Making Any
Electrical Connections or Changes**

CONNECTIONS

CCW LEAD END REVERSIBLE
TO REVERSE ROTATION
INTERCHANGE RED & BLK LEADS
E37403
258501

Mfd for Dayton Electric Mfg. Co., Lake Forest, IL 60045 USA

Made in Mexico