

XMS

Exit Motion Sensor

Versatile Motion Detection for Hands-Free Exit Request

The XMS Passive Infrared motion sensor reliably detects motion near a door and releases its magnetic lock. Versatile mounting options and an easily adjustable infrared beam pattern provide optimal coverage of the egress area for smooth, hands-free lock release and exit.




PRODUCT FEATURES

- Passive Infrared Request to Exit Device
- Automatically and reliably cuts power to the lock with no human intervention
- Request to exit (REX) output
- Easily adjustable beam pattern
- Adjustable time relock
- MagnaCare Lifetime Replacement No Fault Warranty

SPECIFICATIONS

- ANSI/UL 294 Listed
- Dimensions:**
7" L x 1-7/8" W x 1-3/4" H
Indoor use only
- Electrical:**
20mA-50mA (depending on switching status) at 12VDC or 24VDC
- Shipping Weight:**
0.5lbs [0.23kg]

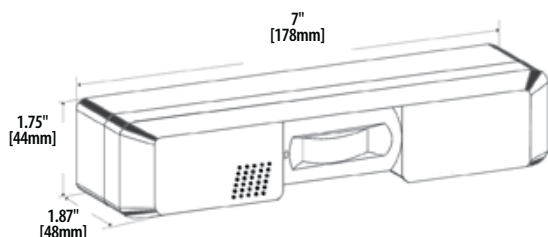

» MODELS

PART # | Description

XMS | Exit Motion Sensor



Safety Note: Securiton recommends that an emergency exit button, such as the EEB, be used in conjunction with the XMS to meet applicable building codes and specific life safety issues.



SECURITRON
ASSA ABLOY