



ULTRATECH
INTERNATIONAL, INC.

How To Use The Ultra-Drain Seal Plus®

Protective cover for drains, grates and manholes against accidental spills.

Follow these easy steps to assure maximum effectiveness:

1. Make sure the Ultra-Drain Seal Plus® is the correct size.

For best results, use a Ultra-Drain Seal Plus® which is 6" larger than the outside of the grate.

2. Apply the Ultra-Drain Seal Plus®.


- Remove all stones, branches, or other debris off the object you desire to cover.
- Remove the plastic film from the Ultra-Drain Seal Plus® and remember to keep it to re-apply before storage.
- Place the Ultra-Drain Seal Plus® over the drain, grate, or manhole you desire to seal.
- To gain a faster seal you may step on the Drain Seal. Never attempt this after spill has reached the drain.

3. Always decontaminate the Ultra-Drain Seal Plus® before reuse or storage.

- Wash the Ultra-Drain Seal Plus® and its plastic film in warm water with a non-abrasive detergent or petroleum solvent cleaner.
- Dry both the Drain Seal and plastic film with a cloth and re-apply the plastic film to the Drain Seal.
- Loosely fold the Drain Seal Plus® and place it back into the box for storage.
- Store the Ultra-Drain Seal Plus® out of direct sunlight, and at room temperature.

IMPORTANT NOTES:

- Never allow the Ultra-Drain Seal Plus® to touch itself for long periods of time.
- The Ultra-Drain Seal Plus® will become less flexible if stored in cold temperatures.
- Due to the nature of softer urethane, the physical properties of these products may change with exposure to certain environmental conditions like temperature, humidity and UV radiation. Please inspect the stored product regularly to ensure it is in a usable state.

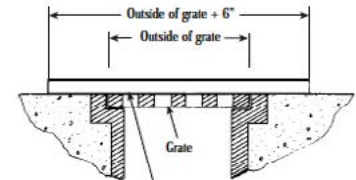

Ultra-Drain Seal

These chemicals are compatible for use with Ultra-Drain Seal:

Acetone*	(Med. Conc.)
Aluminum Salts	Hydrogen Peroxide
Ammonia	Kerosene
Barium Salts	Methyl Alcohol
Benzyl Alcohol	Methyl Ethyl Ketone*
Boric Acid Sol.	(MEK)
Butane	Methylene Chloride*
Butanol	Naptha
Calcium Salts	Nitrogen Oxides
Carbon Dioxide	Oil, Mineral
Chloroform*	Phenol
Chlorothane VG	Sodium
Copper Salts	Sulfuric Acid
Cyclohexanone	(Med. Conc.)
Formaldehyde	Tetrahydrofuran (THF)
Freon	Toluene
Gasoline	Trichloroethylene*
Glycol Ether	Triethylamine
Hydrochloric Acid	Tropylene Glycol
(Med. Conc.)	Turpentine
Hydrofluoric Acid	Water

* Will cause the Ultra-Drain Seal™ to swell temporarily but not degrade.



Ultra-Drain Seal Plus helps seal off drains to minimize problems!